


BP 5

**4.10 (.161)
CENTERS**

**2.50 (.098)
PLUNGER TRAVEL**

Dimensions in mm (inches)

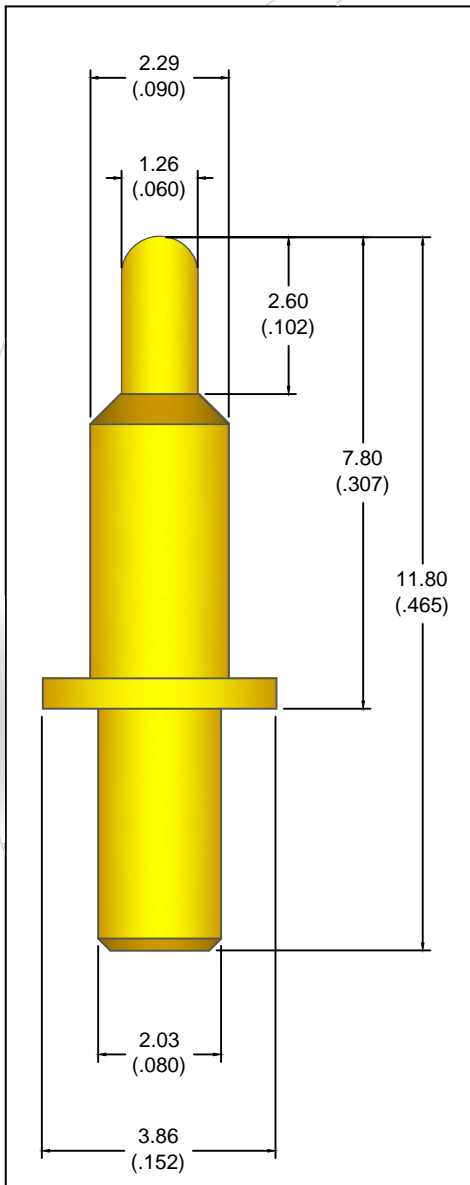

TECHNICAL DATAS

Minimum centers	4.10 mm (.161)
Full travel	2.50 mm (.098)
Rated stroke	1.70 mm (.067)
Probe resistance	<30 MOhm
Operating temperature	-55°C/+105°C (-67°F/+221°F)
Current rating	8 AMP
Spring force	60 gr. (2.12 oz) 120 gr. (4.23 oz) 300 gr. (10.58 oz)

MATERIALS AND FINICHES

Plunger	Copper alloy, Gold plated
Barrel	Copper alloy, Gold plated
Spring	Stainless steel

HOW TO ORDER

MODEL	HEAD	HEAD DIA	SPRING FORCE 2/3 TRAVEL	TREATMENT
BP 5	C	1.26	120	G