

GSC 11


**4.00(.157)
CENTERS**

**3.50(.138)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

Minimum centers	4.00 mm (.157)
Full travel	3.50 mm (.138)
Rated stroke	2.80 mm (.110)
Probe resistance	20 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	5 AMP

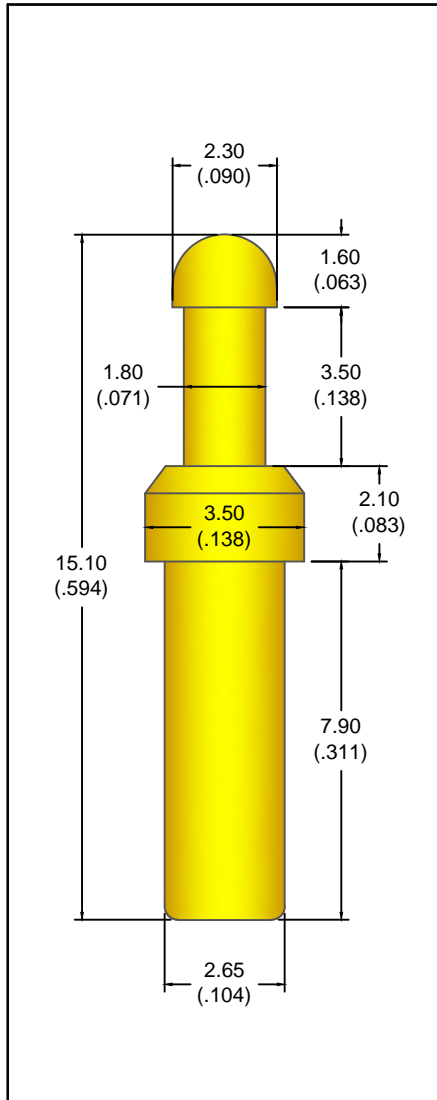

MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
50 (1.76)	150 (5.29)
65 (2.29)	250 (8.82)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

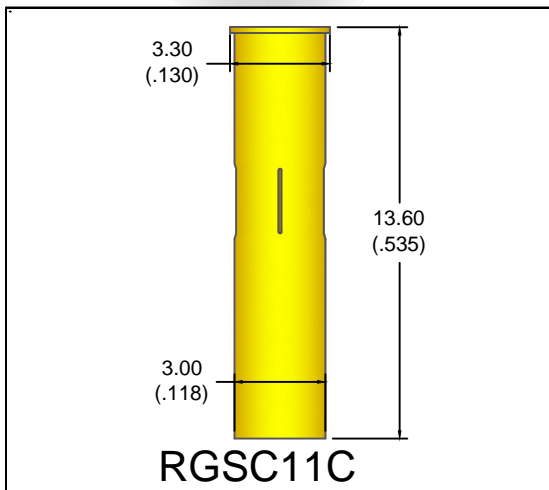

MOUNTING HOLE SIZE

3.00 (.118)



CONNECTIONS

CRIMP - C

MATERIALS AND FINISHES

BARREL Copper alloy gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	2.30(.090)				
	2.30(.090)				
				NOTES	
				MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL GSC 11	HEAD C	HEAD DIA 2.30	SPRING FORCE 2/3 TRAVEL 100	TREATMENT G
------------------------	------------------	-------------------------	--	-----------------------