

GSC 20


**2.54(.100)
CENTERS**

**5.00(.197)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

Minimum centers	2.54 mm (.100)
Full travel	5.00 mm (.197)
Rated stroke	3.50 mm (.138)
Probe resistance	10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

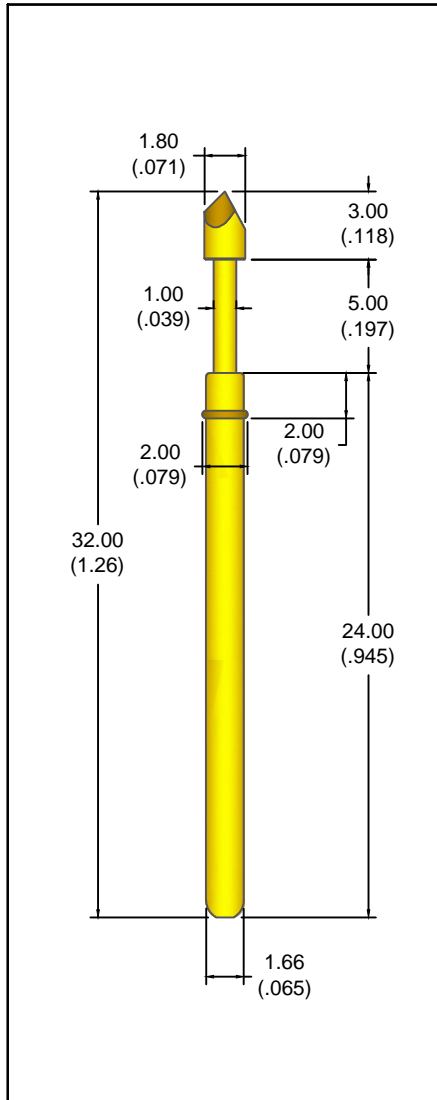

MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
60 (2.12)	150 (5.29)
120 (4.23)	300 (10.58)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

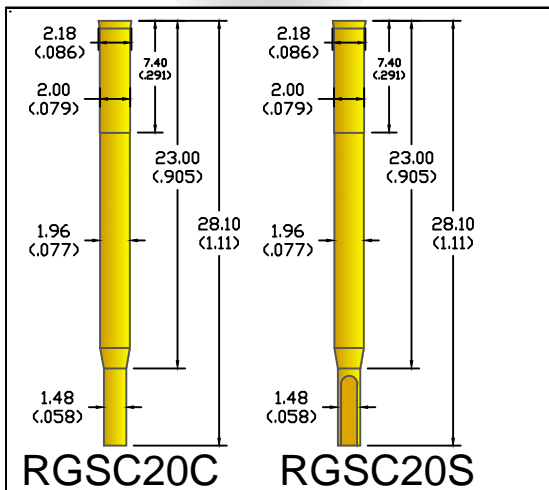

MOUNTING HOLE SIZE

2.00/2.04 (.079/.080)











CONNECTIONS

CRIMP - C
SOLDER - S

MATERIALS AND FINISHES

BARREL Copper alloy gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 	1.80(.071)	 	1.80(.071)		
 	1.00(.039)				
 	1.80(.071)				
 	1.20(.047) 1.80(.071)			NOTES MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL GSC20	HEAD H	HEAD DIA 1.20	SPRING FORCE 2/3 TRAVEL 150	TREATMENT G
----------------	-----------	------------------	-----------------------------------	----------------