


GSC66

**3.50(.138)
CENTERS**

**5.00(.197)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

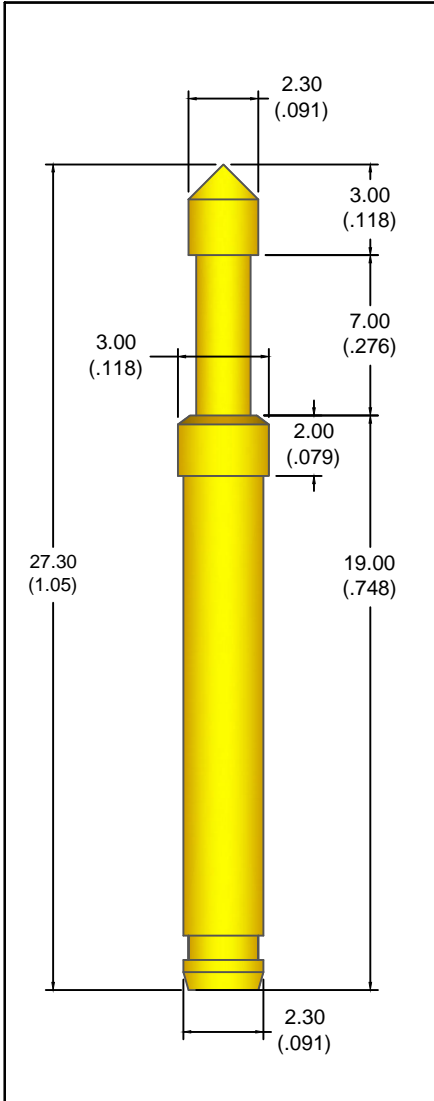

Minimum centers	3.50 mm (.138)
Full travel	5.00 mm (.197)
Rated stroke	4.00 mm (.158)
Probe resistance	< 50 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	10 AMP

MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Stainless steel

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
120(4.23)	300(10.6)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

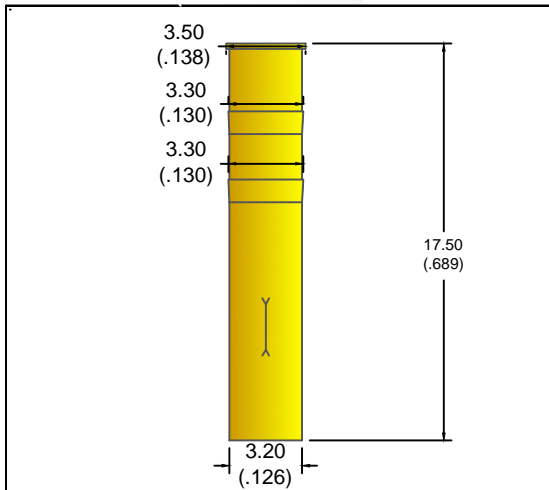


MOUNTING HOLE SIZE

3.25(.128)

MATERIALS AND FINISHES

BARREL	Copper alloy gold plated
--------	--------------------------

AVAILABLE HEAD STYLES

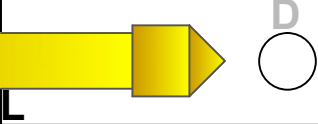AVAILABLE HEAD STYLES					
Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	2.30(.091)				
				NOTES MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL GSC66	HEAD D	HEAD DIA 2.30	SPRING FORCE 2/3 TRAVEL 300	TREATMENT G
-----------------------	------------------	-------------------------	--	-----------------------