


HPP 4

3.96 or 4.75(.156 or .187) 6.35(.250)
SEE PLUNGER DIAMETRE PLUNGER TRAVEL

Dimensions in mm (inches)

TECHNICAL DATAS

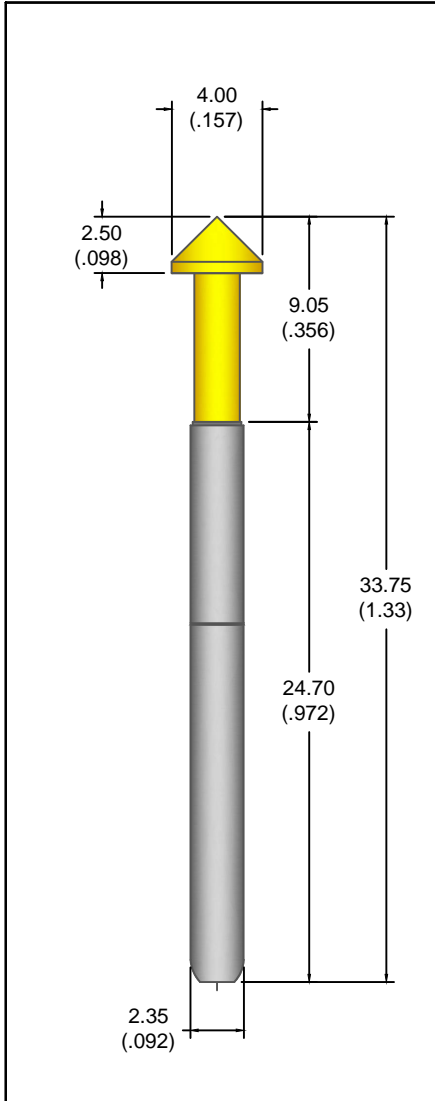

Minimum centers:

C/15-C/20-E/20-F/20-G/20	3.96 mm (.156)
C/40-D/40-E/40-G/40-I/30-I/40	4.75 mm (.187)
Full travel	6.35 mm (.250)
Rated stroke	4.20 mm (.165)
Probe resistance	< 10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	30 AMP

MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
60 (.2.12)	130 (4.59)
80 (2.82)	190 (6.70)
120 (4.23)	300 (10.58)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

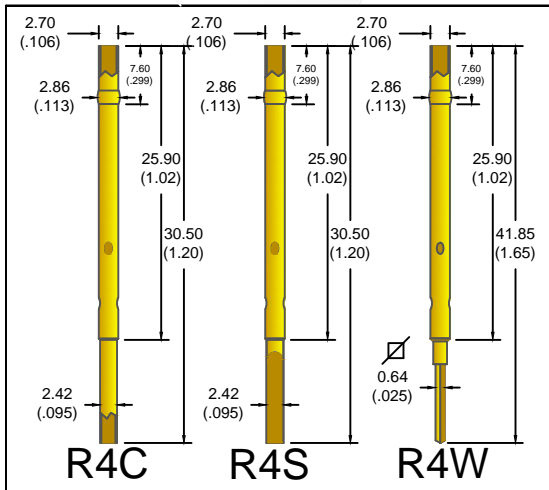

MOUNTING HOLE SIZE

2.72/ 2.77 (.107/.109)













CONNECTIONS

CRIMP - C
 SOLDER - S
 WIRE WRAP - W

MATERIALS AND FINISHES

BARREL	Copper alloy gold plated
SQUARED POST.	Ph Bronze gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 C 	1.50(.059) 2.00(.079) 4.00(.157)	 G 	2.00(.079) 4.00(.157)		
 D 	4.00(.157)	 I 	3.00(.118) 4.00(.157)		
 E 	2.00(.079) 4.00(.157)				
 F 	2.00(.079)			NOTES	
				MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL HPP 4	HEAD E	HEAD DIA 2.00	SPRING FORCE 2/3 TRAVEL 130	TREATMENT G
-----------------------	------------------	-------------------------	--	-----------------------