


TOP SW1

**5.00(.197)
CENTERS**

**4.50(.177)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

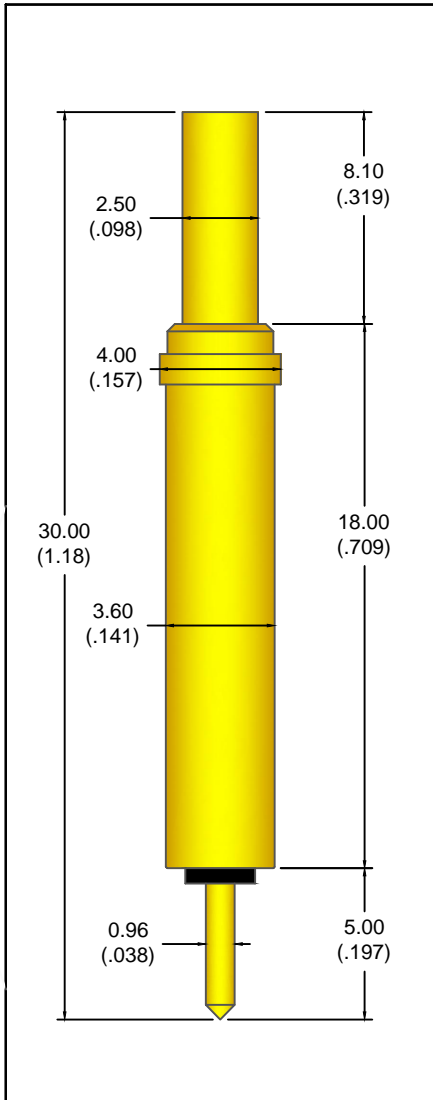

Minimum centers	5.00 mm (.197)
Full travel	4.50 mm (.177)
Switch point	2.50 mm (.098)
Probe resistance	35 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	2 AMP

MATERIALS AND FINISHES

Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated
Insulator	PTFE

SPRING FORCE IN GR. (OZ.)


At switch point	110 (3.88)
-----------------	------------

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

ON REQUEST

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 L	2.50(.098)				
				NOTES MATERIALS S - STEEL D - DELRIN L - COPPER ALLOY	



HOW TO ORDER

MODEL	HEAD	HEAD DIA	SPRING FORCE 2/3 TRAVEL	TREATMENT
SW 1	G	2.50	200	G