


TOP SW3

**3.50(.138)
CENTERS**

**5.10(.201)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

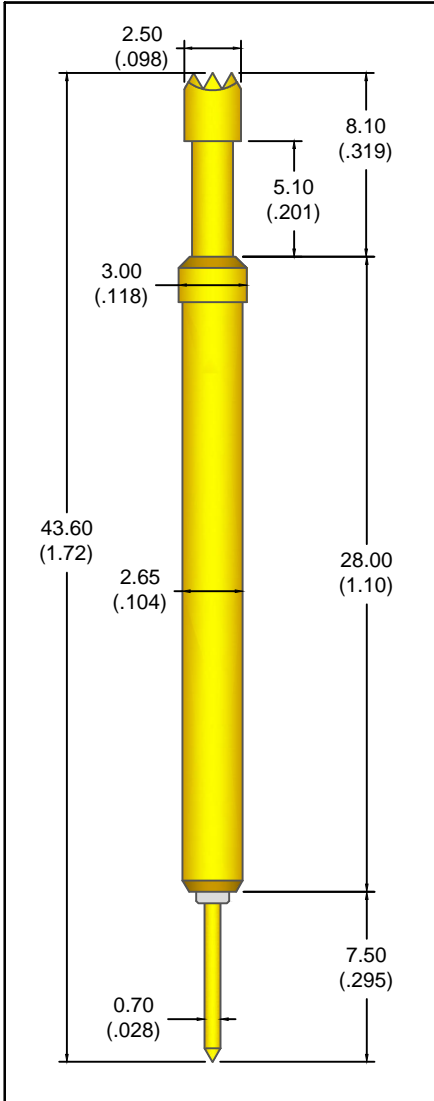

Minimum centers	3.50 mm (.138)
Full travel	5.10 mm (.201)
Switch point	1.70 mm (.067)
Probe resistance	35 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	2 AMP

MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated
Terminal	Copper alloy, gold plated
Insulator	PTFE

SPRING FORCE IN GR. (OZ.)

At switch point	200 (7.05)
	350 (12.35)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

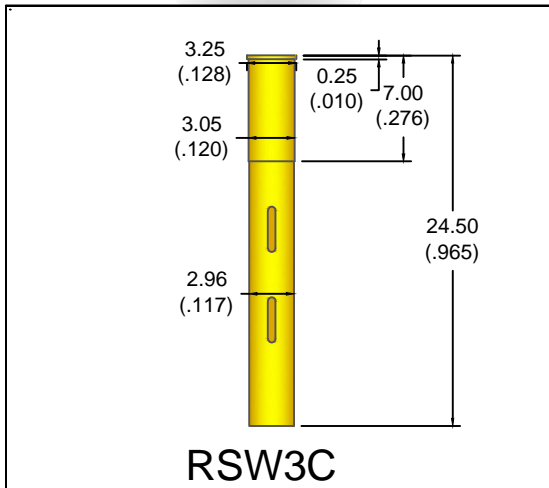

MOUNTING HOLE SIZE

3.00 (.118)




CONNECTIONS

CRIMP - C

MATERIALS AND FINISHES

BARREL Copper alloy gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 G	1.70(.067) 1.80(.071)				
 I	2.50(.098)				
 P	3.00(.118)				
			<p style="text-align: right;">NOTES</p> <p>MATERIALS</p> <p>S - STEEL D - DELRIN L - COPPER ALLOY</p>		



HOW TO ORDER

MODEL SW 3	HEAD I	HEAD DIA 2.50	SPRING FORCE 2/3 TRAVEL 200	TREATMENT G
---------------	-----------	------------------	-----------------------------------	----------------