

# TOP SW41


**3.96(.156)  
CENTERS**

**3.10(.122)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

Minimum centers	3.96 mm (.156)
Full travel	3.10 mm (.122)
Switch point	1.00 mm (.039)
Operating temperature	-55°C / +105°C (-67°F / +221°F)
Current rating	3 AMP

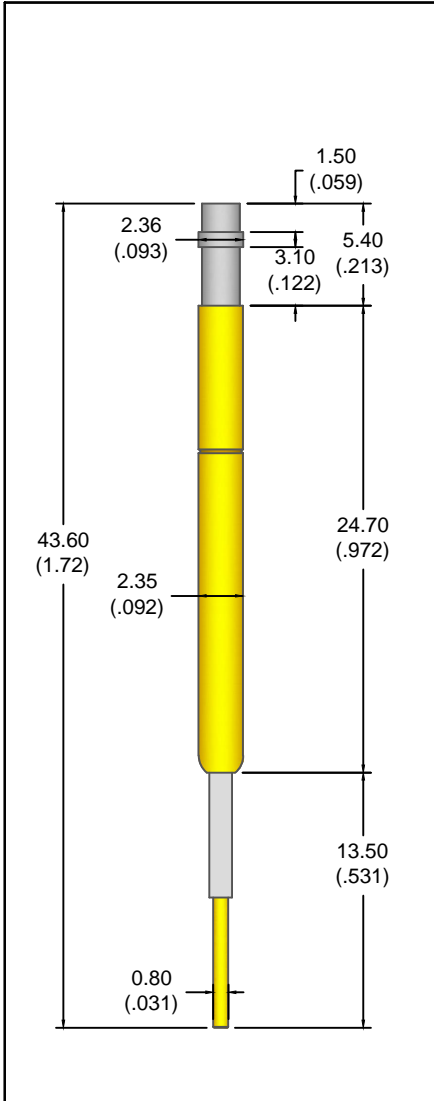

## MATERIALS AND FINISHES


Plunger	Copper alloy, Hardgold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated
Terminal	Copper alloy, gold plated
Insulator	PTFE

## SPRING FORCE IN GR. (OZ.)

At switch point	120(4.23)
-----------------	-----------

Additional spring forces available. Please consult factory

## RECEPTACLE SPECIFICATIONS

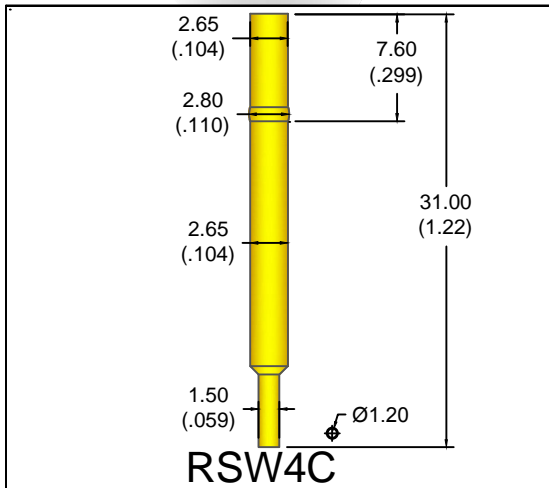


**MOUNTING HOLE SIZE**  
2.74/2.79(.107/.110)

**CONNECTIONS**  
CRIMP - C

## MATERIALS AND FINISHES

BARREL	Copper alloy gold plated
--------	--------------------------

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	2.00(.079)				
				<b>NOTES</b> <b>MATERIALS</b> <b>S</b> - STEEL <b>D</b> - DELRIN <b>L</b> - COPPER ALLOY	



### HOW TO ORDER

MODEL SW 41	HEAD G	HEAD DIA 2.00	SPRING FORCE 2/3 TRAVEL 120	TREATMENT H
----------------	-----------	------------------	-----------------------------------	----------------