

TOP SW4

**3.96(.156)
CENTERS**


**SEE BELOW
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

Minimum centers 3.96 mm (.156)
 Switch point 1.00 mm (.039)
 Operating temperature -55°C/ +105°C (-67°F/+221°F)
 Current rating 2 AMP

Pistone	DIM."A"	DIM."B"
G 130	5.90(.232)	4.10(.161)
G 200	6.90(.272)	3.10(.122)

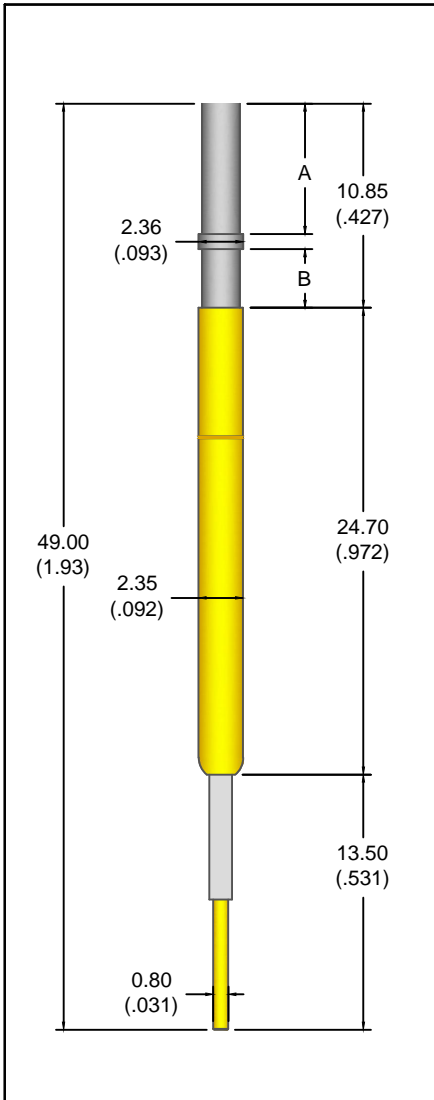

MATERIALS AND FINISHES


Plunger Copper alloy, Hardgold plated
 Barrel Copper alloy, gold plated
 Spring Music wire, gold plated
 Terminal Copper alloy, gold plated
 Insulator PTFE

SPRING FORCE IN GR. (OZ.)

At switch point 120(4.23)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

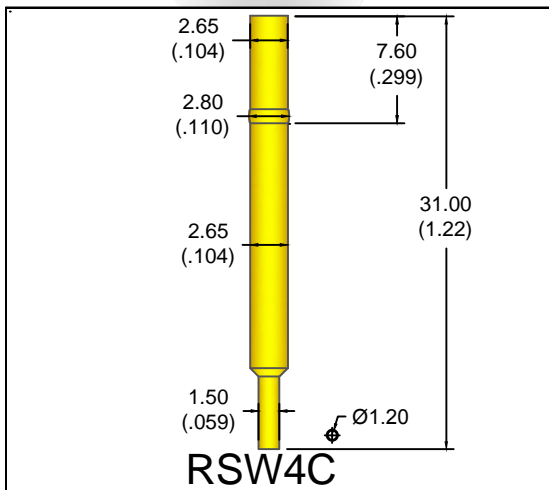



MOUNTING HOLE SIZE
 2.74/2.79(.107/.110)

CONNECTIONS
 CRIMP - C

MATERIALS AND FINISHES

BARREL Copper alloy gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
  L	1.30(.051) 2.00(.079)				
				NOTES MATERIALS S - STEEL D - DELRIN L - COPPER ALLOY	



HOW TO ORDER

MODEL SW 4	HEAD G	HEAD DIA 1.30	SPRING FORCE 2/3 TRAVEL 120	TREATMENT H
---------------	-----------	------------------	-----------------------------------	----------------