


# TOP SWT

**3.50(.138)  
CENTERS**

**5.10(.201)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

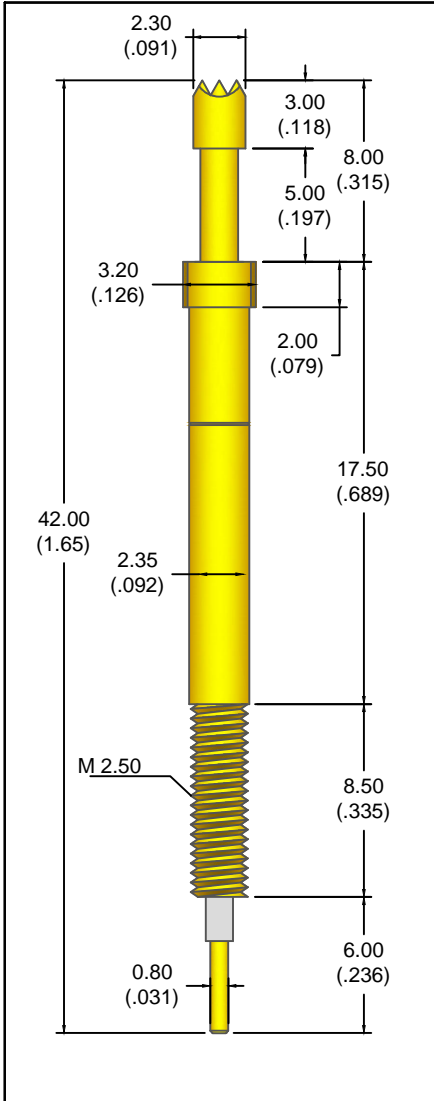

Minimum centers	3.50 mm (.138)
Full travel	5.10 mm (.201)
Switch point	1.70 mm (.067)
Operating temperature	-55°C / +105°C (-67°F / +221°F)
Current rating	2 AMP

## MATERIALS AND FINISHES


Plunger	Copper alloy, Hardgold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated
Terminal	Copper alloy, gold plated
Insulator	PTFE

## SPRING FORCE IN GR. (OZ.)

At switch point	180(6.35)
-----------------	-----------

Additional spring forces available. Please consult factory

## RECEPTACLE SPECIFICATIONS

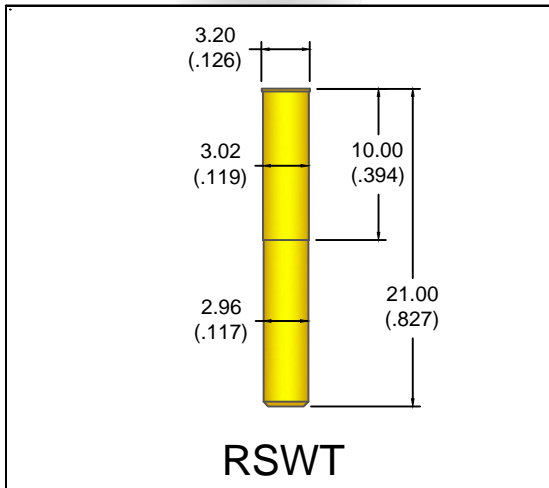



## MOUNTING HOLE SIZE

3.00(.118)

## MATERIALS AND FINISHES

BARREL Copper alloy gold plated

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 <b>L</b>	2.30(.091)				
 <b>D</b>	3.50(.138)				
				<b>NOTES</b> <b>MATERIALS</b> <b>S</b> - STEEL <b>D</b> - DELRIN <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL SW T	HEAD I	HEAD DIA 2.30	SPRING FORCE 2/3 TRAVEL 180	TREATMENT G
---------------	-----------	------------------	-----------------------------------	----------------