


TOP 010

**1.27(.050)
CENTERS**

**2.54(.100)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

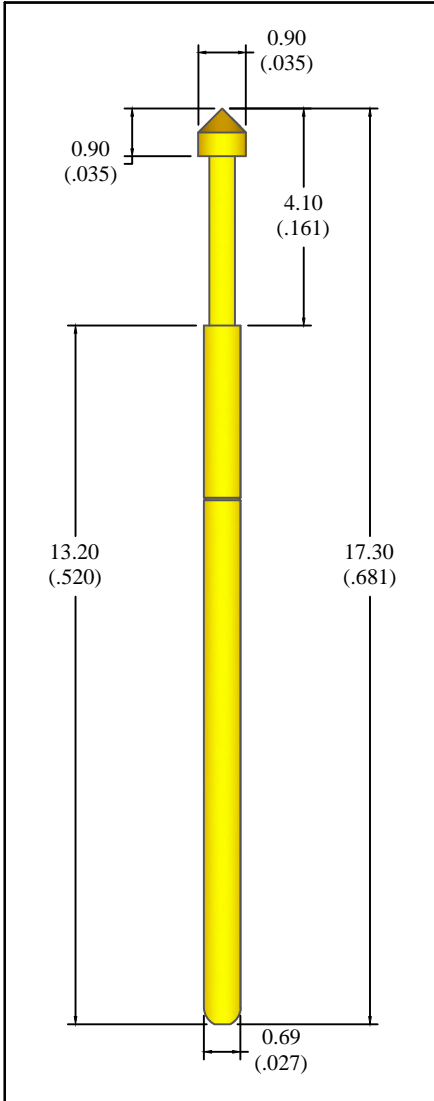

Minimum centers	1.27 mm (.050)
Full travel	2.54 mm (.100)
Rated stroke	1.70 mm (.067)
Probe resistance	< 25 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	2 AMP

MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
30 (1.06)	100 (3.53)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

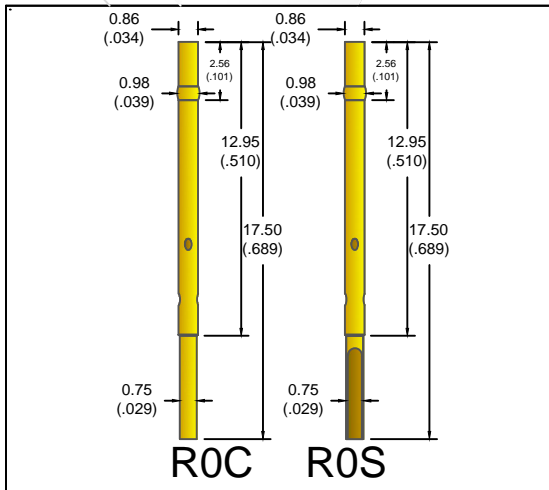

MOUNTING HOLE SIZE

0.89/0.92 (.035/.036)



CONNECTIONS

CRIMP - C
SOLDER - S

MATERIALS AND FINISHES

BARREL Copper alloy gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	0.90(.035)				
	0.90(.035)				
				NOTES MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL TOP 010	HEAD D	HEAD DIA 0.90	SPRING FORCE 2/3 TRAVEL 100	TREATMENT G
------------------	-----------	------------------	-----------------------------------	----------------