


# TOP 01

**1.27(.050)  
CENTERS**

**1.15(.045)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

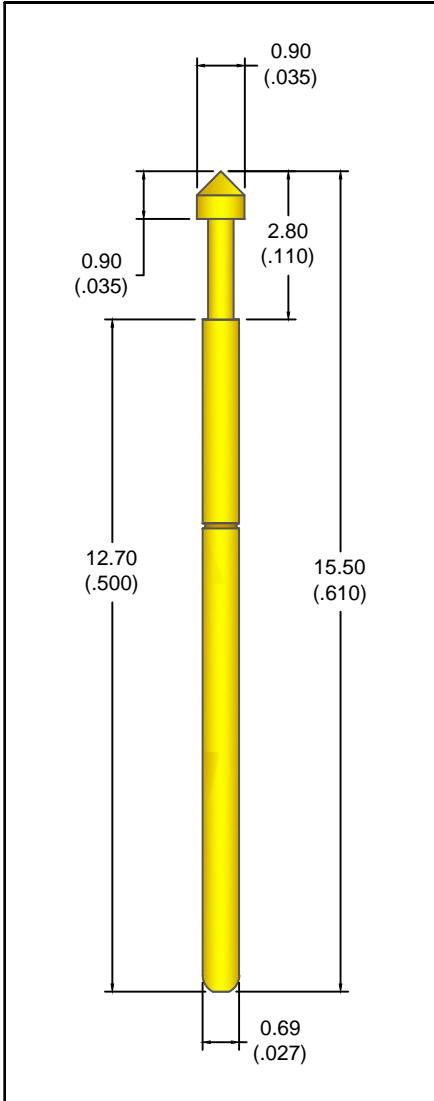

Minimum centers	1.27 mm (.050)
Full travel	1.90 mm (.075)
Rated stroke	1.27 mm (.050)
Probe resistance	< 25 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	2 AMP

## MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

## SPRING FORCE IN GR. (OZ.)

<b>PRELOAD</b>	<b>2/3 TRAVEL</b>
30 (1.06)	100 (3.53)

Additional spring forces available. Please consult factory

## RECEPTACLE SPECIFICATIONS

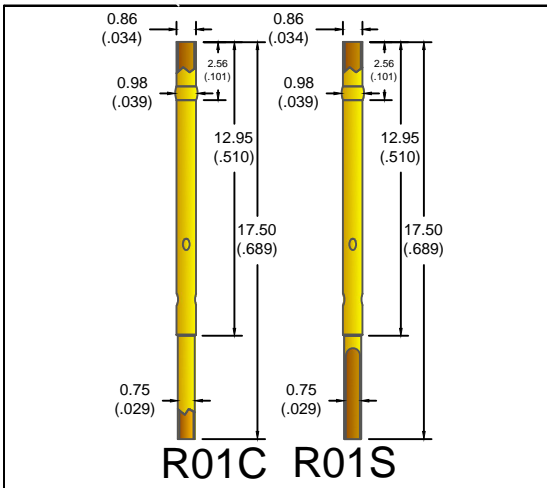

## MOUNTING HOLE SIZE

0.89/0.92 (.035/.036)



## CONNECTIONS

CRIMP - C  
SOLDER - S

## MATERIALS AND FINISHES

BARREL Copper alloy gold plated

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 <b>C</b>	0.50(.020)				
 <b>D</b>	0.90(.035) 1.20(.047)				
				<b>NOTES</b>	
				<b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL <b>TOP 01</b>	HEAD <b>C</b>	HEAD DIA <b>0.90</b>	SPRING FORCE 2/3 TRAVEL <b>100</b>	TREATMENT <b>G</b>
------------------------	------------------	-------------------------	------------------------------------------	-----------------------