


TOP 033

**1.27(.050)
CENTERS**

**6.90(.272)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

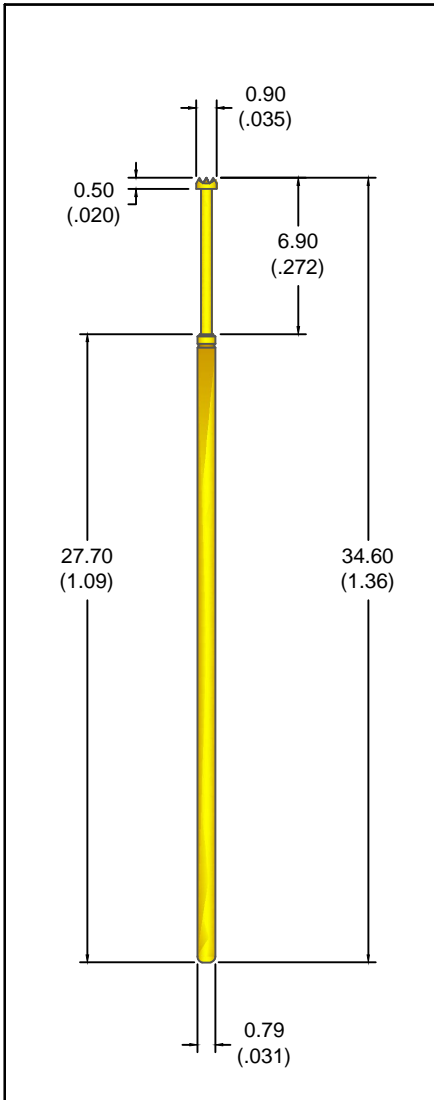

Minimum centers	1.27 mm (.050)
Full travel	6.90 mm (.272)
Rated stroke	4.60 mm (.181)
Probe resistance	< 16 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
40 (1.41)	100 (3.53)
60 (2.12)	150 (5.29)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

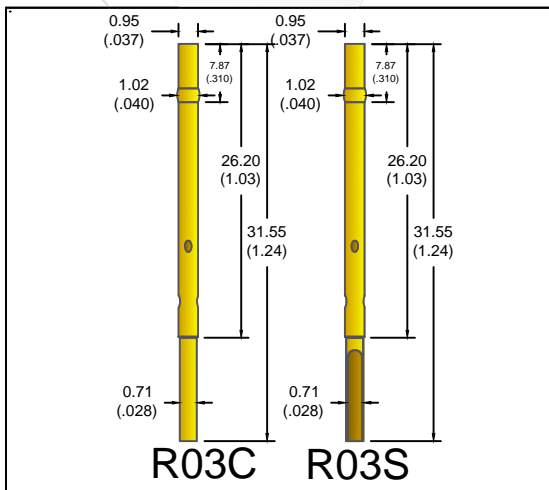






MOUNTING HOLE SIZE
0.98/1.00 (.038/.039)

CONNECTIONS
CRIMP - C
SOLDER - S

MATERIALS AND FINISHES

BARREL Copper alloy gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 L	A 0.50(.020)	 S	WN 0.50(.020)		
 L	C 0.50(.020)				
 L	I 0.90(.035)				
 L	S 0.50(.020)			NOTES MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL TOP 033	HEAD I	HEAD DIA 0.90	SPRING FORCE 2/3 TRAVEL 100	TREATMENT G
------------------	-----------	------------------	-----------------------------------	----------------