


# TOP 03

**1.27(.050)  
CENTERS**

**6.00(.236)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

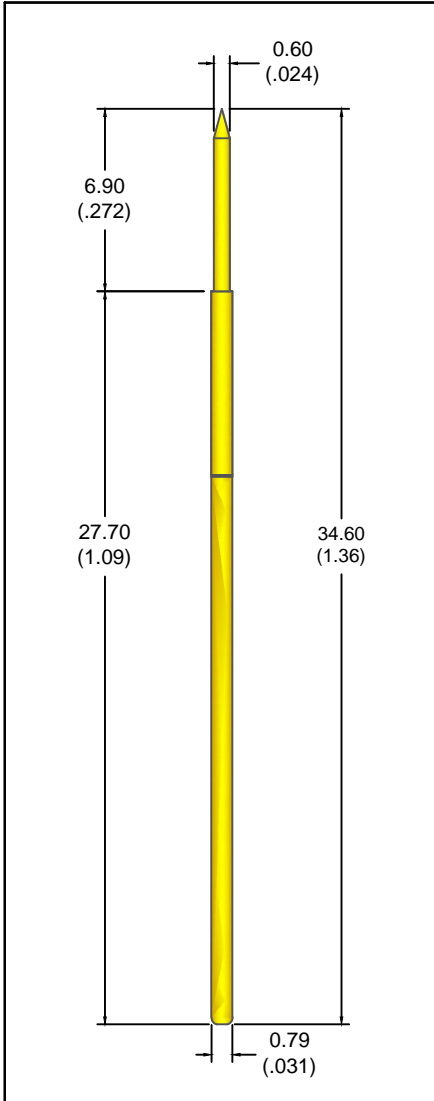

Minimum centers	1.27 mm (.050)
Full travel	6.00 mm (.236)
Rated stroke	4.20 mm (.165)
Probe resistance	< 16 MOhm
Operating temperature	-55°C / +105°C (-67°F / +221°F)
Current rating	3 AMP

## MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

## SPRING FORCE IN GR. (OZ.)

<b>PRELOAD</b>	<b>2/3 TRAVEL</b>
40 (1.41)	100 (3.53)

Additional spring forces available. Please consult factory

## RECEPTACLE SPECIFICATIONS

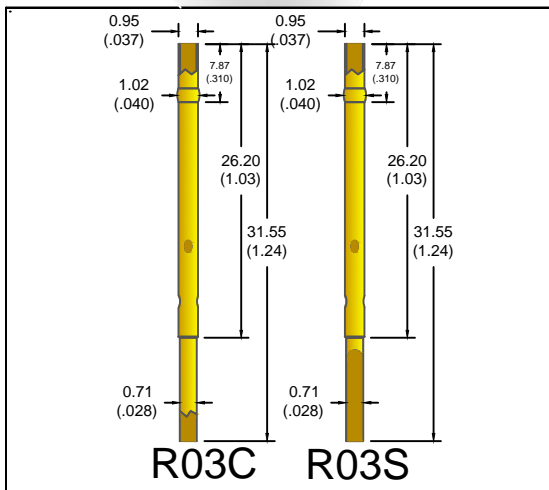

## MOUNTING HOLE SIZE

0.98/1.00 (.038/.039)



## CONNECTIONS

CRIMP - C  
SOLDER - S

## MATERIALS AND FINISHES

BARREL Copper alloy gold plated

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 <b>L</b>	0.60(.024)				
 <b>S</b>	0.60(.024)				
				<b>NOTES</b> <b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL TOP 03	HEAD C	HEAD DIA 0.60	SPRING FORCE 2/3 TRAVEL 100	TREATMENT G
-----------------	-----------	------------------	-----------------------------------	----------------