

# TOP 04

**1.27(.050)  
CENTERS**

**1.70(.067)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

Minimum centers	1.27 mm (.050)
Full travel	1.70mm (.050)
Rated stroke	1.13 mm (.044)
Probe resistance	< 20 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

**NON MAGNETIC PROBE**

## MATERIALS AND FINISHES

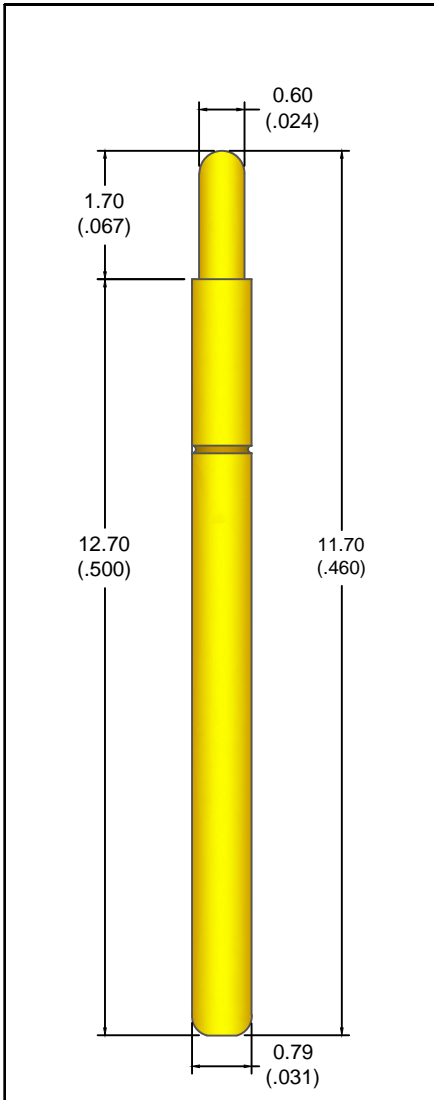
Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Beryllium Copper, gold plated

## SPRING FORCE IN GR. (OZ.)

<b>PRELOAD</b>	<b>2/3 TRAVEL</b>
10 (.035)	40 (1.41)



**Additional spring forces available. Please consult factory**

## RECEPTACLE SPECIFICATIONS



# ON REQUEST

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 	0.60(.024)				
				<b>NOTES</b> <b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL TOP 04	HEAD C	HEAD DIA 0.60	SPRING FORCE 2/3 TRAVEL 40	TREATMENT G
-----------------	-----------	------------------	----------------------------------	----------------