


TOP 06

**1.27(.050)
CENTERS**

**6.35(.250)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

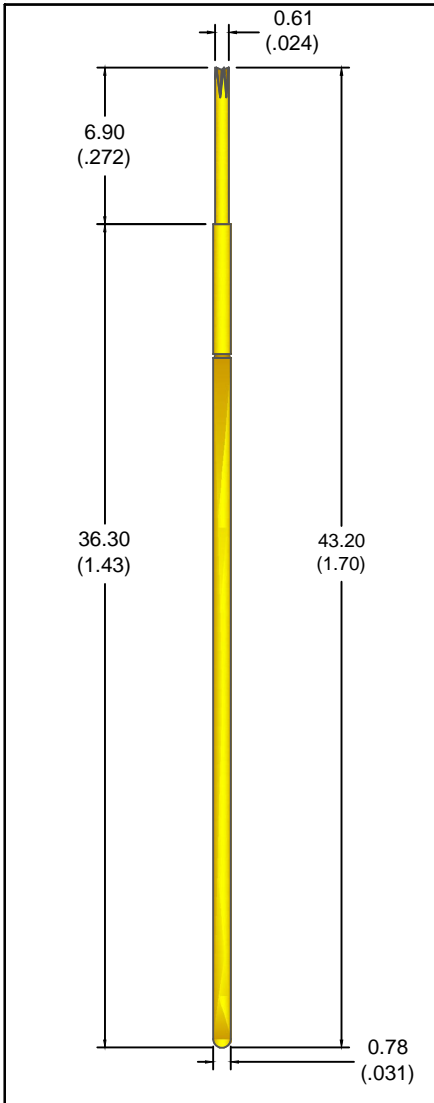

Minimum centers	1.27 mm (.050)
Full travel	6.35 mm (.250)
Rated stroke	4.20 mm (.165)
Probe resistance	< 20 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
80 (2.82)	200(7.06)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

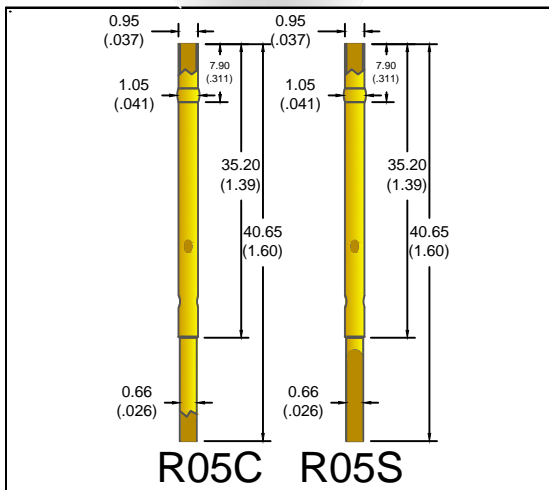



MOUNTING HOLE SIZE
0.96/0.99 (.038/.039)

CONNECTIONS
CRIMP - C
SOLDER - S

MATERIALS AND FINISHES

BARREL Copper alloy gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 L/S	0.50(.020) 0.60(.024)				
 L	0.50(.020) 0.60(.024)				
				NOTES MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL TOP 06	HEAD AC	HEAD DIA 0.50	SPRING FORCE 2/3 TRAVEL 200	TREATMENT G
-----------------	------------	------------------	-----------------------------------	----------------