


# TOP 0

**1.27(.050)  
CENTERS**

**2.54(.100)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

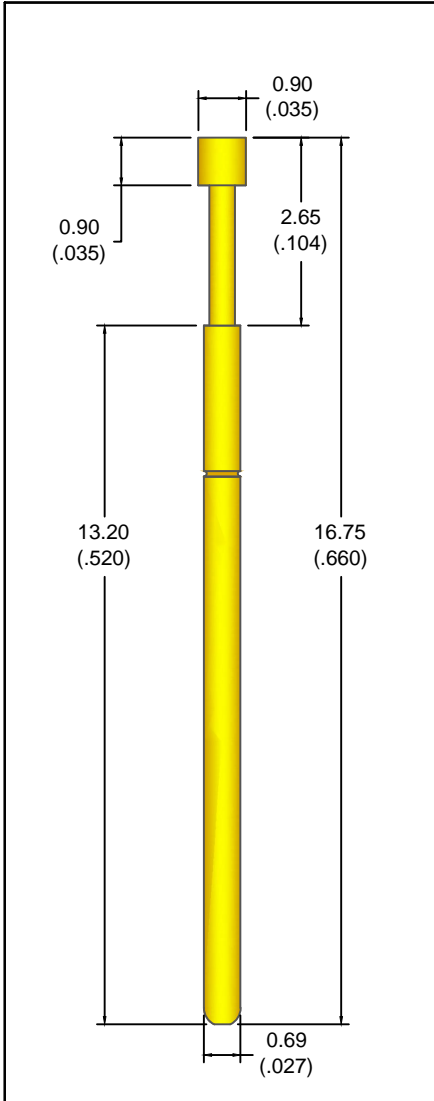

Minimum centers	1.27 mm (.050)
Full travel	2.54 mm (.100)
Rated stroke	1.70 mm (.067)
Probe resistance	< 25 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	2 AMP

## MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

## SPRING FORCE IN GR. (OZ.)

<b>PRELOAD</b>	<b>2/3 TRAVEL</b>
15 (.529)	60 (2.12)
30 (1.06)	100 (3.53)

Additional spring forces available. Please consult factory

## RECEPTACLE SPECIFICATIONS

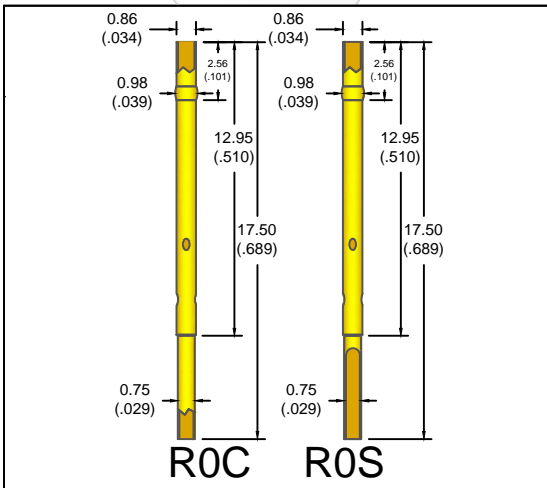















**MOUNTING HOLE SIZE**  
0.89/0.92 (.035/.036)

**CONNECTIONS**  
CRIMP - C  
SOLDER - S

## MATERIALS AND FINISHES

BARREL Copper alloy gold plated

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 <b>A</b> 	0.90(.035)	 <b>F</b> 	0.50(.020)		
 <b>C</b> 	0.50(.020) 0.90(.035)	 <b>H</b> 	0.25(.010)		
 <b>D</b> 	0.90(.035)	 <b>I</b> 	0.90(.035)		
 <b>E</b> 	0.50(.020) 0.90(.035) 1.40(.055)			<b>NOTES</b>	
				<b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL <b>TOP 0</b>	HEAD <b>C</b>	HEAD DIA <b>0.90</b>	SPRING FORCE 2/3 TRAVEL <b>100</b>	TREATMENT <b>G</b>
-----------------------	------------------	-------------------------	--	-----------------------