


TOP 12

**1.91(.075)
CENTERS**

**2.04(.080)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

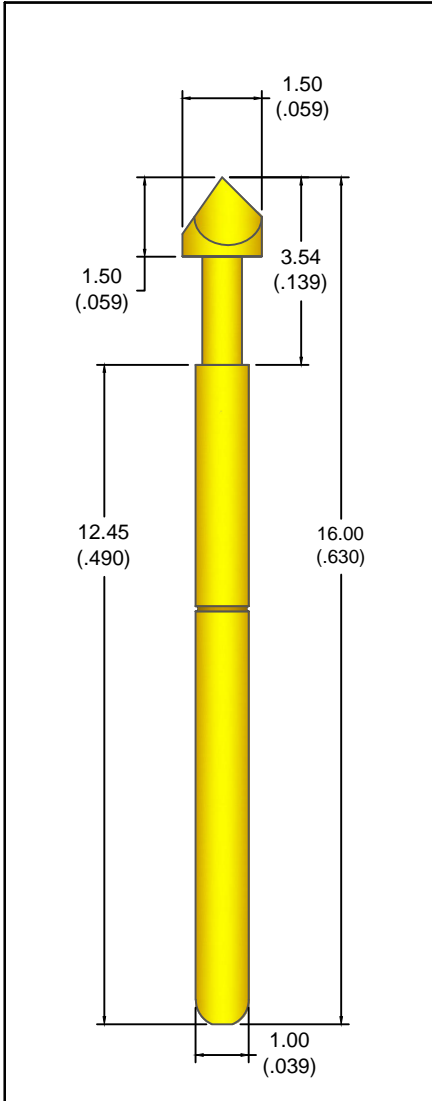

Minimum centers	1.91 mm (.075)
Full travel	2.04 mm (.080)
Rated stroke	1.36 mm (.053)
Probe resistance	<10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
40 (1.41)	100 (3.53)
60 (2.12)	150 (5.29)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

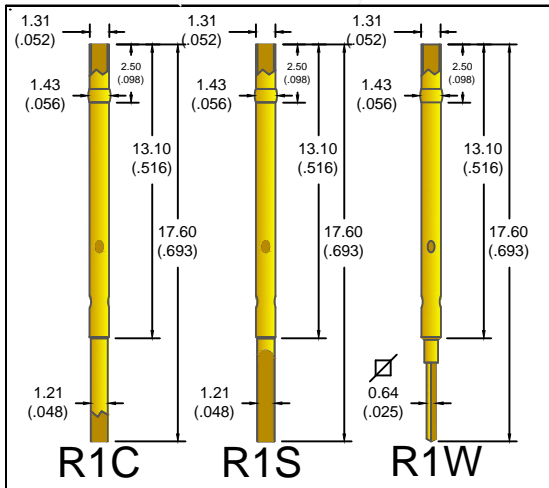

MOUNTING HOLE SIZE

1.38/1.40 (.054/.055)















CONNECTIONS

CRIMP - C
SOLDER - S
WIRE WRAP - W

MATERIALS AND FINISHES

BARREL	Copper alloy gold plated
SQUARED POST.	Ph Bronze gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 A 	1.50(.059)	 F 	0.75(.029)		
 C 	0.75(.029) 1.00(.039) 1.50(.059)	 G 	1.50(.059)		
 D 	1.00(.039) 1.50(.059)	 I 	1.50(.059) 2.00(.079)		
 E 	0.75(.029) 1.50(.059)			NOTES	
				MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL TOP 12	HEAD C	HEAD DIA 0.75	SPRING FORCE 2/3 TRAVEL 100	TREATMENT G
------------------------	------------------	-------------------------	--	-----------------------