


# TOP 15

**1.91(.075)  
CENTERS**

**6.35(.250)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

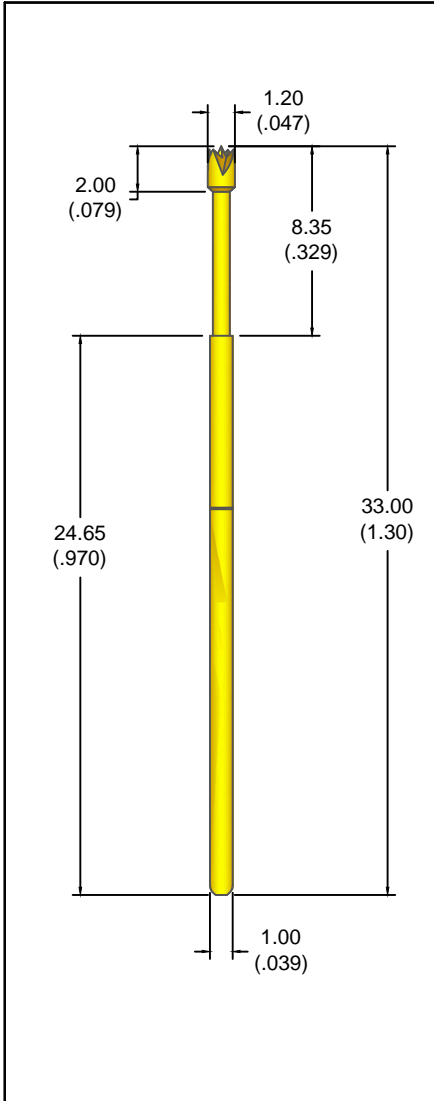

Minimum centers	1.91 mm (.075)
Full travel	6.35 mm (.250)
Rated stroke	4.20 mm (.165)
Probe resistance	< 10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

## MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

## SPRING FORCE IN GR. (OZ.)

<b>PRELOAD</b>	<b>2/3 TRAVEL</b>
40 (1.41)	140 (4.94)
80 (2.82)	210 (7.41)

Additional spring forces available. Please consult factory

## RECEPTACLE SPECIFICATIONS

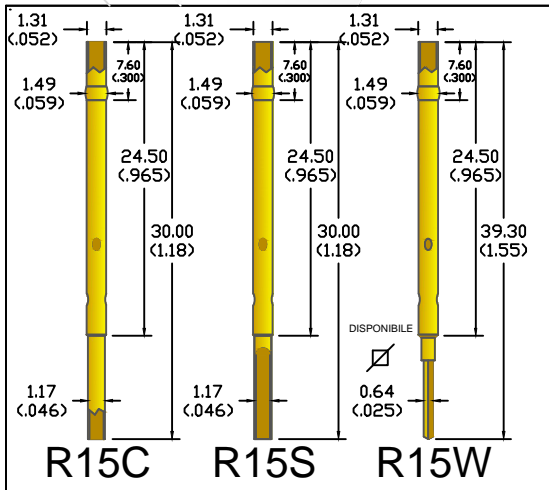

## MOUNTING HOLE SIZE

1.38/1.40 (.054/.055)










## CONNECTIONS

- CRIMP - C
- SOLDER - S
- WIRE WRAP - W

## MATERIALS AND FINISHES

BARREL	Copper alloy gold plated
SQUARED POST.	Ph Bronze gold plated

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	0.90(.035) 1.20(.047)		1.20(.047) 1.40(.055)		0.75(.030)
	1.40(.055)		1.20(.047) 1.50(.059)		
	0.75(.030) 0.90(.035) 1.40(.055)		1.20(.047)		
	1.40(.055)		1.20(.047)	<b>NOTES</b> <b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL TOP 15	HEAD L	HEAD DIA 1.20	SPRING FORCE 2/3 TRAVEL 210	TREATMENT G
-----------------	-----------	------------------	-----------------------------------	----------------