


# TOP 1

**1.91(.075)  
CENTERS**

**2.54(.100)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

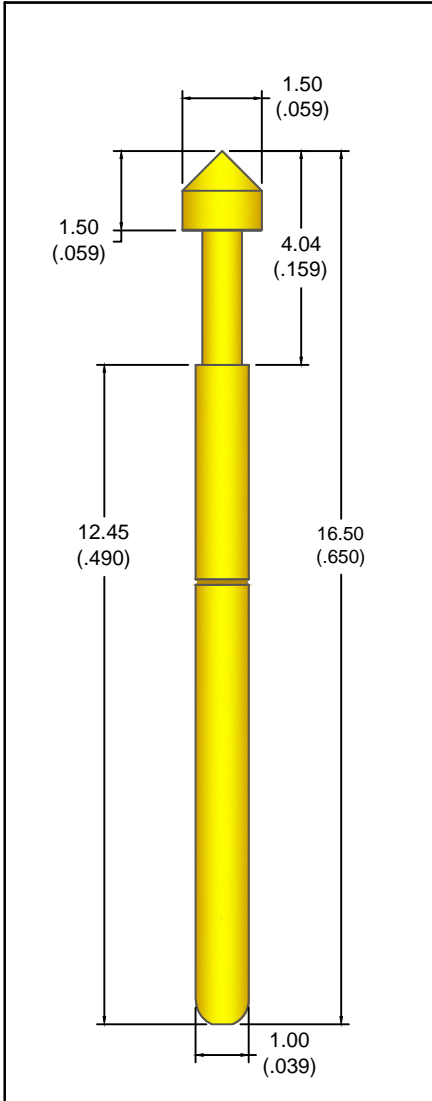

Minimum centers	1.91 mm (.075)
Full travel	2.54 mm (.100)
Rated stroke	1.70 mm (.067)
Probe resistance	<10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

## MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

## SPRING FORCE IN GR. (OZ.)

<b>PRELOAD</b>	<b>2/3 TRAVEL</b>
40 (1.41)	100 (3.53)
60 (2.12)	150 (5.29)

Additional spring forces available. Please consult factory

## RECEPTACLE SPECIFICATIONS

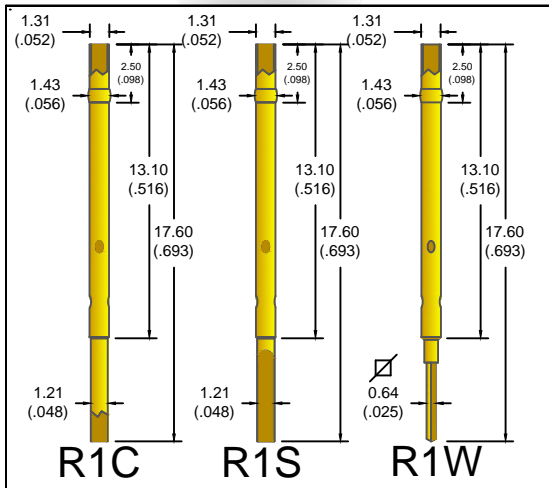

## MOUNTING HOLE SIZE

1.38/1.40 (.054/.055)








## CONNECTIONS

CRIMP - C  
SOLDER - S  
WIRE WRAP - W

## MATERIALS AND FINISHES

BARREL	Copper alloy gold plated
SQUARED POST.	Ph Bronze gold plated

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 <b>A</b>	1.50(.059)	 <b>F</b>	0.75(.029)		
 <b>C</b>	0.75(.029) 1.00(.039) 1.50(.059)	 <b>G</b>	1.50(.059)		
 <b>D</b>	1.00(.039) 1.50(.059)	 <b>I</b>	1.50(.059) 2.00(.079)		
 <b>E</b>	0.75(.029) 1.50(.059)			<b>NOTES</b>	
				<b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL <b>TOP 1</b>	HEAD <b>C</b>	HEAD DIA <b>0.75</b>	SPRING FORCE 2/3 TRAVEL <b>100</b>	TREATMENT <b>G</b>
-----------------------	------------------	-------------------------	--	-----------------------