


# TOP 20

**2.54(.100)  
CENTERS**

**3.60(.142)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

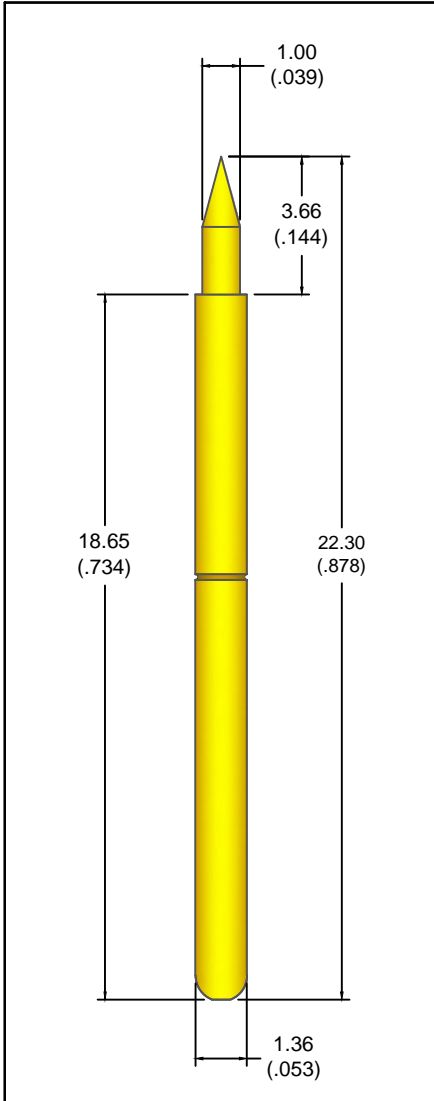

Minimum centers	2.54 mm (.100)
Full travel	3.60 mm (.142)
Rated stroke	2.40 mm (.094)
Probe resistance	< 25 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

## MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

## SPRING FORCE IN GR. (OZ.)

<b>PRELOAD</b>	<b>2/3 TRAVEL</b>
30 (1.06)	100 (3.53)

Additional spring forces available. Please consult factory

## RECEPTACLE SPECIFICATIONS

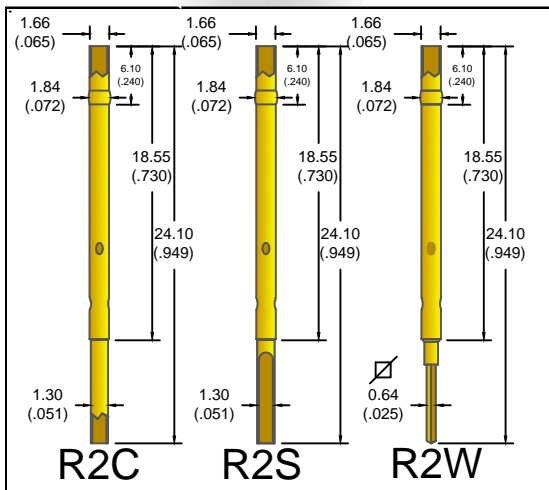

**MOUNTING HOLE SIZE**  
1.73/1.78 (.068/.070)

## CONNECTIONS

CRIMP - C  
SOLDER - S  
WIRE WRAP - W

## MATERIALS AND FINISHES

BARREL Copper alloy gold plated  
SQUARED POST. Ph Bronze gold plated

## AVAILABLE HEAD STYLES

AVAILABLE HEAD STYLES					
Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	1.00(.039)				
				<b>NOTES</b> <b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL TOP 20	HEAD F	HEAD DIA 1.00	SPRING FORCE 2/3 TRAVEL 100	TREATMENT G
-----------------	-----------	------------------	-----------------------------------	----------------