

TOP 21


**2.54(.100)
CENTERS**

**2.50(.098)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

Minimum centers	2.54 mm (.100)
Full travel	2.50 mm (.098)
Rated stroke	1.70 mm (.067)
Probe resistance	< 25 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

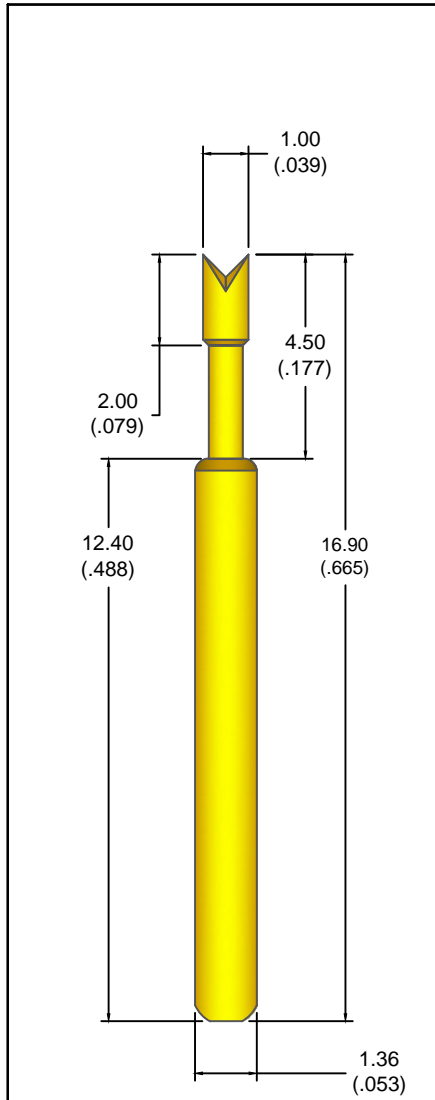

MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
30 (1.06)	120 (4.23)
40 (1.41)	180 (6.35)
60 (2.12)	210 (7.41)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

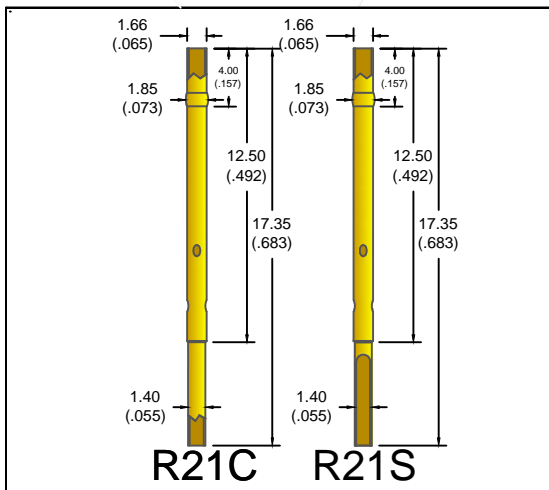

MOUNTING HOLE SIZE

1.73/1.78 (.068/.070)











CONNECTIONS

CRIMP - C
SOLDER - S

MATERIALS AND FINISHES

BARREL	Copper alloy gold plated
SQUARED POST.	Ph Bronze gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 A 	1.50(.059)	 I 	1.50(.059) 2.50(.098)		
 C 	0.75(.029) 1.50(.059)				
 F 	0.75(.029)				
 H 	1.00(.039)			NOTES	
				MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL TOP 21	HEAD I	HEAD DIA 1.50	SPRING FORCE 2/3 TRAVEL 120	TREATMENT G
------------------------	------------------	-------------------------	--	-----------------------