


TOP 227

**2.54(.100)
CENTERS**

**1.52(.060)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

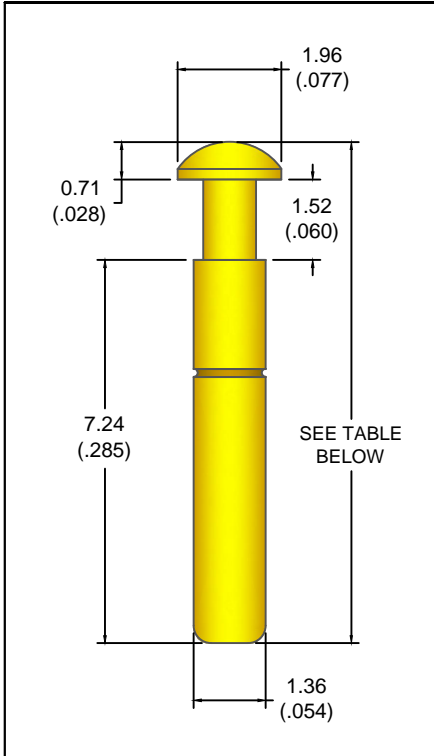

Minimum centers	2.54 mm (.100)
Full travel	1.52 mm (.060)
Rated stroke	1.27 mm (.050)
Probe resistance	< 20 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

MATERIALS AND FINISHES

Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated


HEAD STYLES	HEAD LENGTHS
A 191	1.27(.050)
A 196	1.02(.040)
C 100	0.71(.028)
C 196	0.71(.028)
I 100	1.40(.055)
I 191	1.52(.060)

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
50 (1.76)	100 (3.53)
60 (2.12)	200 (7.05)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

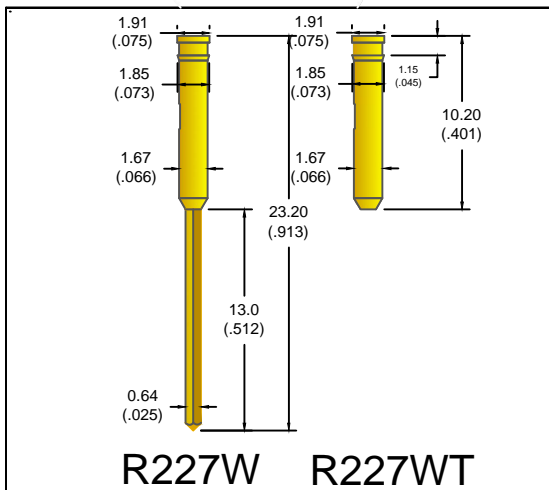

MOUNTING HOLE SIZE

1.73/1.78 (.068/.070)





CONNECTIONS

WIRE WRAP - W
WITHOUT TAIL: WT

MATERIALS AND FINISHES

BARREL Copper alloy gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	1.91(.075) 1.96(.077)				
	1.00(.039) 1.96(.077)				
	1.96(.077)				
	1.00(.039) 1.91(.075)			NOTES MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL TOP 227	HEAD C	HEAD DIA 1.96	SPRING FORCE 2/3 TRAVEL 100	TREATMENT G
-------------------------	------------------	-------------------------	--	-----------------------