


TOP 33

**3.18(.125)
CENTERS**

**6.35(.250)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

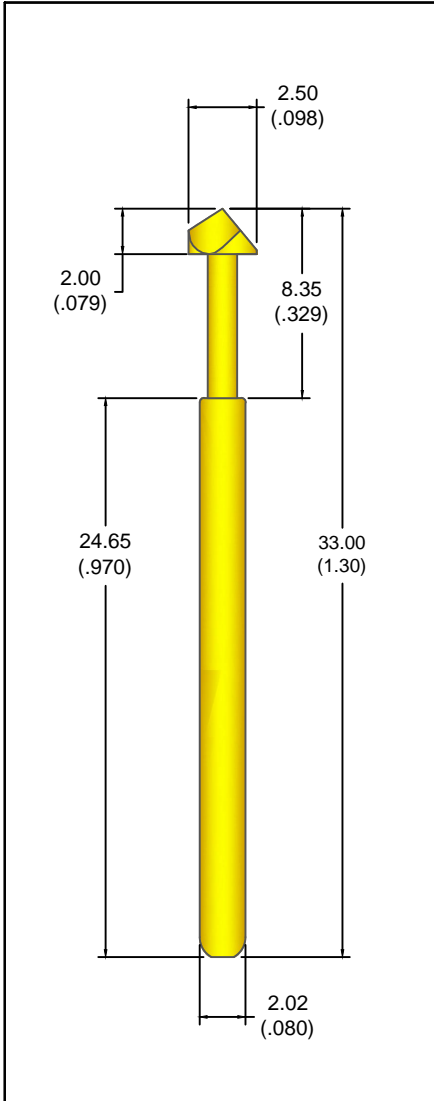

Minimum centers	3.18 mm (.125)
Full travel	6.35 mm (.250)
Rated stroke	4.20 mm (.165)
Probe resistance	< 10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	5 AMP

MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
40 (1.41)	120 (4.23)
60 (2.12)	180 (6.35)
80 (2.82)	250 (8.82)
150 (5.29)	440 (15.5)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

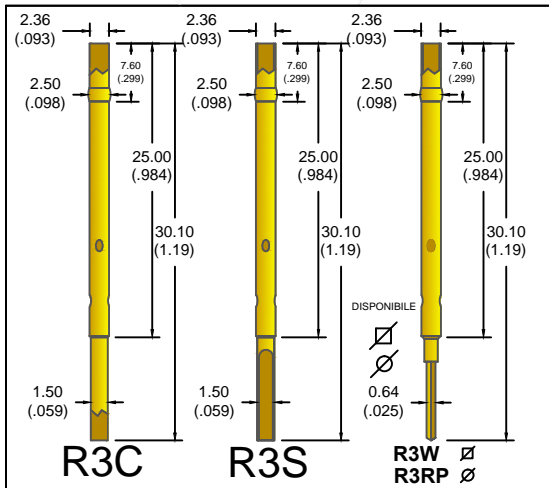

MOUNTING HOLE SIZE

2.39/2.45 (.094/.096)










CONNECTIONS

CRIMP - C
SOLDER - S
WIRE WRAP - W

MATERIALS AND FINISHES

BARREL Copper alloy gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 A	3.00(.118)	 F	1.30(.051)	 RF	1.70(.067)
 C	1.20(.047) 2.50(.098)	 G	1.20(.047) 2.50(.098)		
 D	2.50(.098)	 H	2.00(.079) 2.50(.098)		
 E	2.50(.098)	 I	1.20(.047) 1.70(.067) 2.50(.098) 4.00(.157)	NOTES	
				MATERIALS	
				S - STEEL	
				L - COPPER ALLOY	

HOW TO ORDER

MODEL TOP 33	HEAD D	HEAD DIA 2.50	SPRING FORCE 2/3 TRAVEL 120	TREATMENT G
------------------------	------------------	-------------------------	--	-----------------------