


# TOP 4

**3.96 or 4.75(.156 or .187) 6.35(.250)**  
**SEE PLUNGER DIAMETRE PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

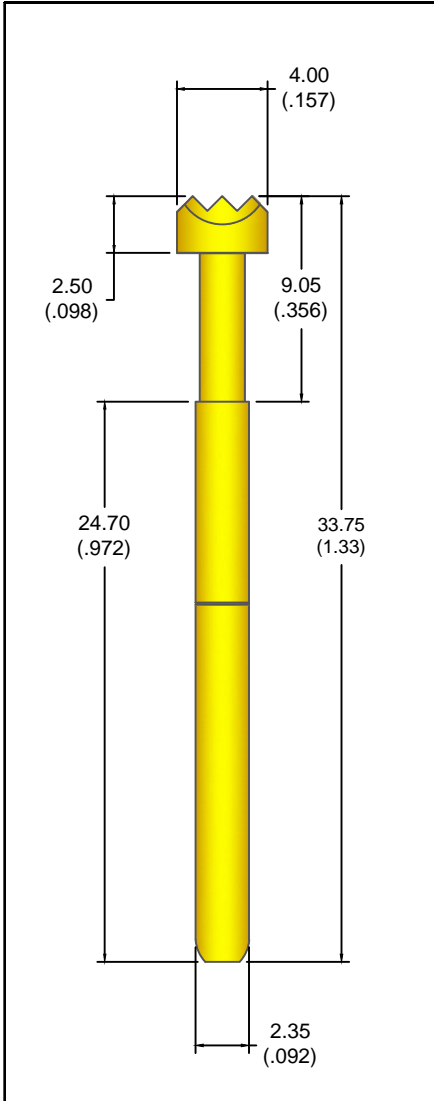

Minimum centers:

C/15-C/20-E/20-F/20-G/20	3.96 mm (.156)
C/40-D/40-E/40-G/40-I/30-I/40	4.75 mm (.187)
Full travel	6.35 mm (.250)
Rated stroke	4.20 mm (.165)
Probe resistance	< 10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	5 AMP

## MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

## SPRING FORCE IN GR. (OZ.)

<b>PRELOAD</b>	<b>2/3 TRAVEL</b>
60 (.2.12)	130 (4.59)
80 (2.82)	190 (6.70)
120 (4.23)	300 (10.58)

Additional spring forces available. Please consult factory

## RECEPTACLE SPECIFICATIONS

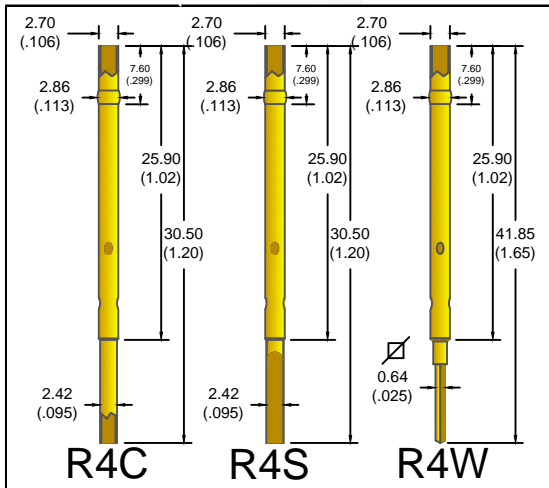

## MOUNTING HOLE SIZE

2.72/ 2.77 (.107/.109)













## CONNECTIONS

CRIMP - C  
 SOLDER - S  
 WIRE WRAP - W

## MATERIALS AND FINISHES

BARREL	Copper alloy gold plated
SQUARED POST.	Ph Bronze gold plated

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 <b>C</b> 	1.50(.059) 2.00(.079) 4.00(.157)	 <b>G</b> 	2.00(.079) 4.00(.157)		
 <b>D</b> 	4.00(.157)	 <b>I</b> 	3.00(.118) 4.00(.157)		
 <b>E</b> 	2.00(.079) 4.00(.157)				
 <b>F</b> 	2.00(.079)			<b>NOTES</b> <b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL <b>TOP 4</b>	HEAD <b>E</b>	HEAD DIA <b>2.00</b>	SPRING FORCE 2/3 TRAVEL <b>130</b>	TREATMENT <b>G</b>
-----------------------	------------------	-------------------------	--	-----------------------