


# TOP 5

**4.75 (.187)  
CENTERS**

**6.35 (.250)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

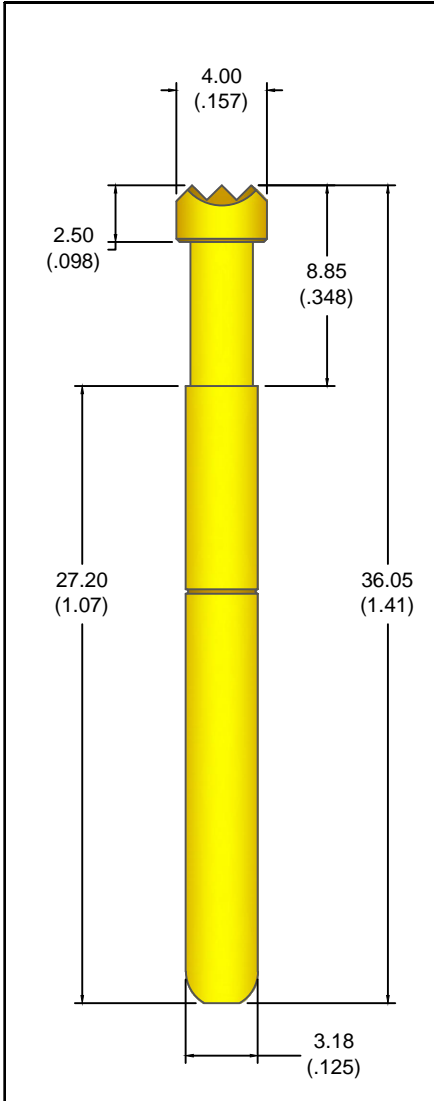

Minimum centers	4.75 mm (.187)
Full travel	6.35 mm (.250)
Rated stroke	4.20 mm (.165)
Probe resistance	< 10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	5 AMP

## MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

## SPRING FORCE IN GR. (OZ.)

<b>PRELOAD</b>	<b>2/3 TRAVEL</b>
80 (2.82)	190 (6.70)
150 (5.29)	400 (14.1)

Additional spring forces available. Please consult factory

## RECEPTACLE SPECIFICATIONS

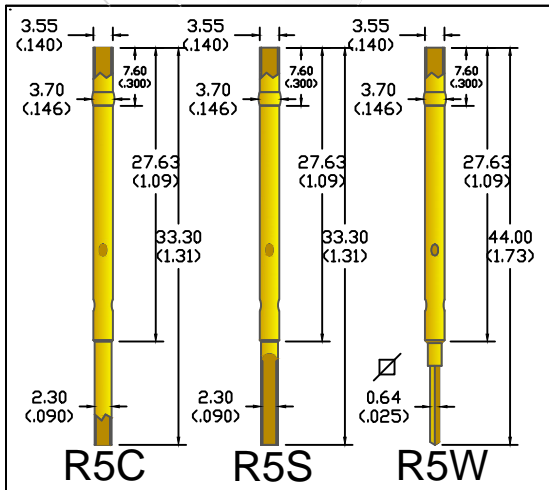

**MOUNTING HOLE SIZE**  
0.89/0.92 (.035/.036)















## CONNECTIONS

CRIMP - C  
SOLDER - S  
WIRE WRAP - W

## MATERIALS AND FINISHES

BARREL Copper alloy gold plated

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 <b>C</b> 	4.00(.157)	 <b>G</b> 	2.80(.110) 4.00(.157)		
 <b>D</b> 	4.00(.157)	 <b>H</b> 	3.00(.118)		
 <b>E</b> 	2.80(.110) 4.00(.157)	 <b>I</b> 	2.80(.110) 4.00(.157)		
 <b>F</b> 	2.80(.110)			<b>NOTES</b> <b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL <b>TOP 5</b>	HEAD <b>C</b>	HEAD DIA <b>4.00</b>	SPRING FORCE 2/3 TRAVEL <b>190</b>	TREATMENT <b>G</b>
-----------------------	------------------	-------------------------	---------------------------------------	-----------------------