

# TOP 92


**6.50(.256)  
CENTERS**

**5.00(.197)  
PLUNGER TRAVEL**

Dimensions in mm (inches)

## TECHNICAL DATAS

Minimum centers	6.50 mm (.256)
Full travel	5.00 mm (.197)
Rated stroke	3.30 mm (.130)
Probe resistance	< 10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	50 AMP

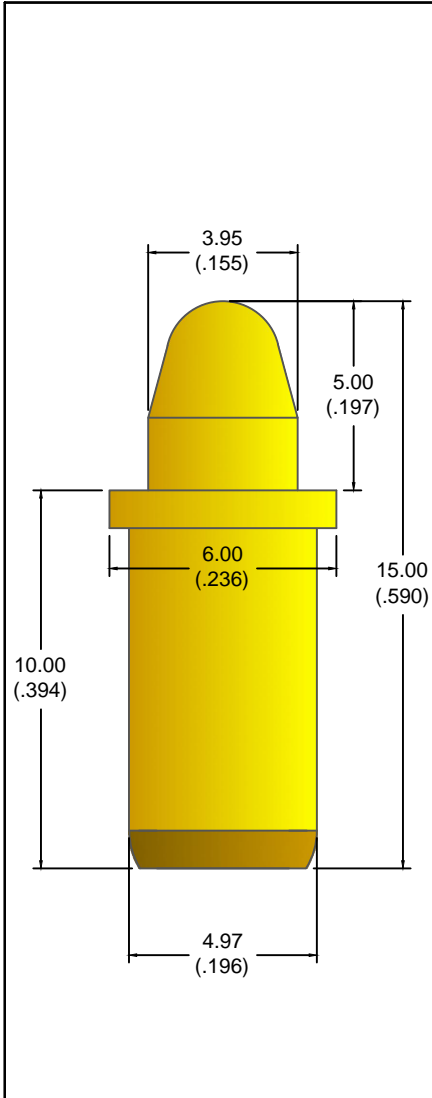

## MATERIALS AND FINISHES


Plunger	Copper alloy, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

## SPRING FORCE IN GR. (OZ.)

<b>PRELOAD</b>	<b>2/3 TRAVEL</b>
40 (1.41)	100 (3.53)
132 (4.66)	300 (10.58)
155 (5.47)	400 (14.11)
360 (12.70)	800 (28.22)

**Additional spring forces available. Please consult factory**

## RECEPTACLE SPECIFICATIONS

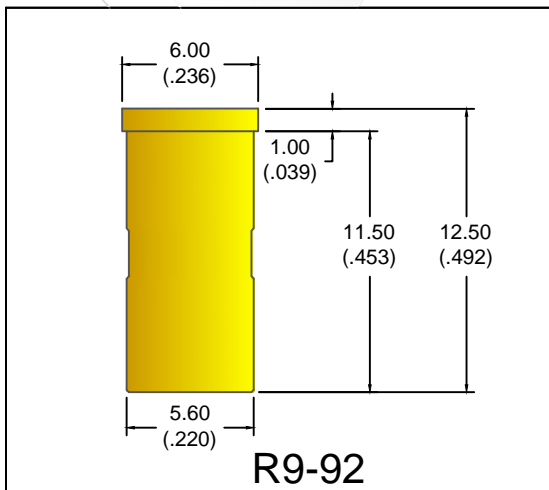





**MOUNTING HOLE SIZE**  
5.70/5.90 (.224/.232)

## MATERIALS AND FINISHES

BARREL	Copper alloy gold plated
--------	--------------------------

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 <b>C</b> 	3.95(.155)				
 <b>CA</b> 	3.95(.155)				
				<b>NOTES</b> <b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL TOP 92	HEAD CA	HEAD DIA 3.95	SPRING FORCE 2/3 TRAVEL 100	TREATMENT G
-----------------	------------	------------------	-----------------------------------	----------------