

TOP THR01


**2.54(.100)
CENTERS**

**5.30(.209)
PLUNGER TRAVEL**

Dimensions in mm (inches)

TECHNICAL DATAS

Minimum centers	2.54 mm (.100)
Full travel	5.30 mm (.209)
Rated stroke	4.00 mm (.157)
Probe resistance	< 50 mOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	5 AMP

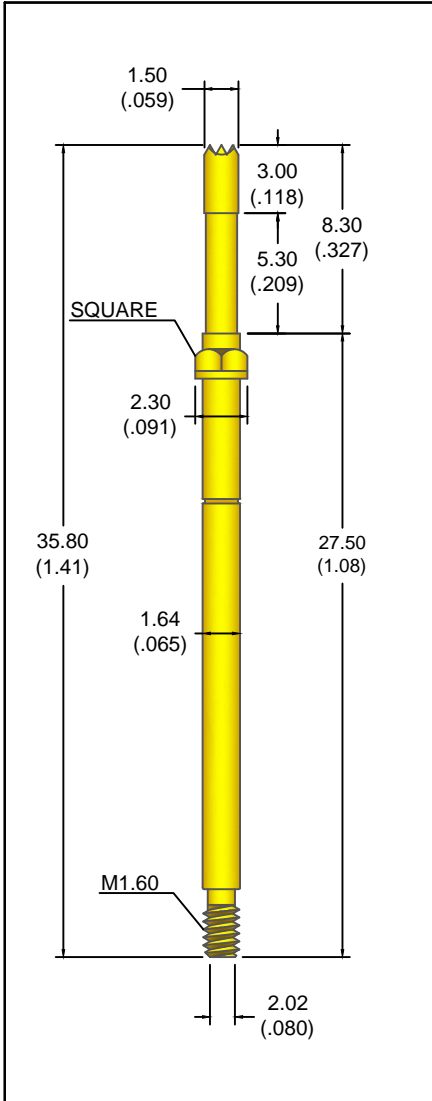

MATERIALS AND FINISHES

Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)







PRELOAD	2/3 TRAVEL
40 (1.41)	100 (3.53)
50 (1.76)	150 (5.29)
100 (3.53)	300 (10.6)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

ON REQUEST

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
 L	 0.65(.026)				
 S	 0.80(.031)				
 L/S	 1.50(.059) 1.80(.071) 2.00(.079) 2.50(.098)				
			NOTES		
			MATERIALS S - STEEL L - COPPER ALLOY		

HOW TO ORDER

MODEL THR01	HEAD I	HEAD DIA 1.80	SPRING FORCE 2/3 TRAVEL 150	TREATMENT G
-----------------------	------------------	-------------------------	------------------------------------------	-----------------------