Specifications subject to change without notice

TOP THR01

2.54(.100) CENTERS

5.30(.209) PLUNGER TRAVEL

Dimensions in mm (inches)

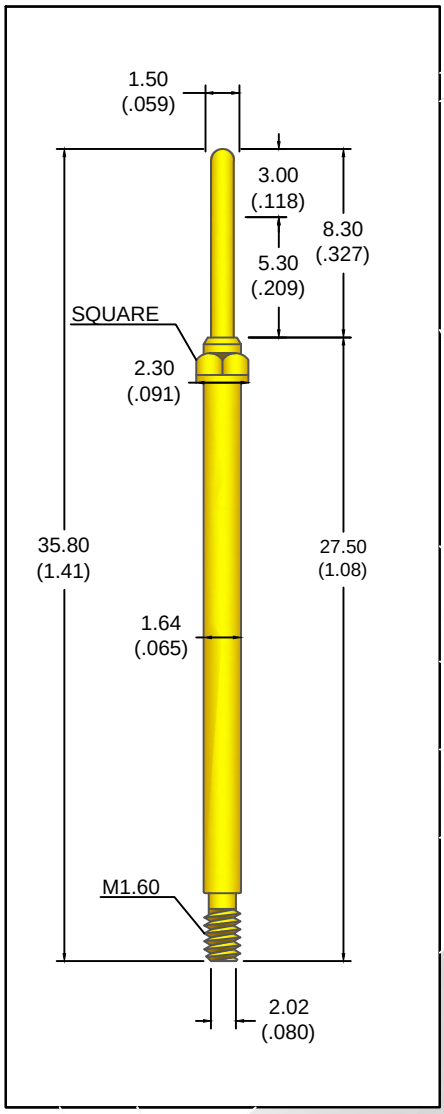

TECHNICAL DATAS

Minimum centers	2.54 mm (.100)
Full travel	5.30 mm (.209)
Rated stroke	4.00 mm (.157)
Probe resistance	< 50 mOhm
Operating temperature	**-55°C/ +105°C (-67°F/+221°F)**
Current rating	5 AMP

MATERIALS AND FINISHES

Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
40 (1.41)	100 (3.53)
50 (1.76)	150 (5.29)
100 (3.53)	300 (10.6)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

ON REQUEST

B.T.AUTOMATICA SRL e-mail info@btautomatica.it Tel. I-0456300400 Fax I-0456300717

Specifications subject to change without notice

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	0.65(.026)				
	0.80(.031) 1.00(.039)				
	1.30(.051)				
				NOTES **MATERIALS** **S** - STEEL **L** - COPPER ALLOY	

HOW TO ORDER

MODEL	HEAD	HEAD DIA	SPRING FORCE 2/3 TRAVEL	TREATMENT
THR11	**I**	**1.30**	**150**	**G**

B.T.AUTOMATICA SRL e-mail info@btautomatica.it **Tel. I-0456300400 Fax I-0456300717**