

# TOP 225 AUTOMOTIVE


DEPENDS TO THE DIAMETER OF COLLAR DEPENDS TO THE POSITION OF THE RING

## CENTERS

## PLUNGER TRAVEL

Dimensions in mm (inches)

### TECHNICAL DATAS

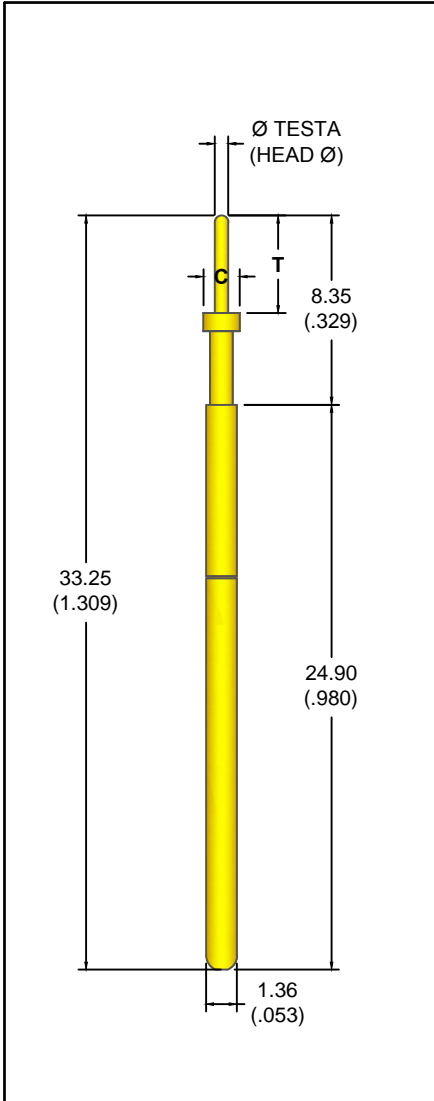

Probe resistance	< 10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	3 AMP

### MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Bronze, gold plated
Spring	Music wire, gold plated

### SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
30 (1.06)	100 (3.53)
60 (2.12)	200 (7.05)
100 (3.53)	250 (8.82)
120 (4.23)	300 (10.58)

Additional spring forces available. Please consult factory

### RECEPTACLE SPECIFICATIONS

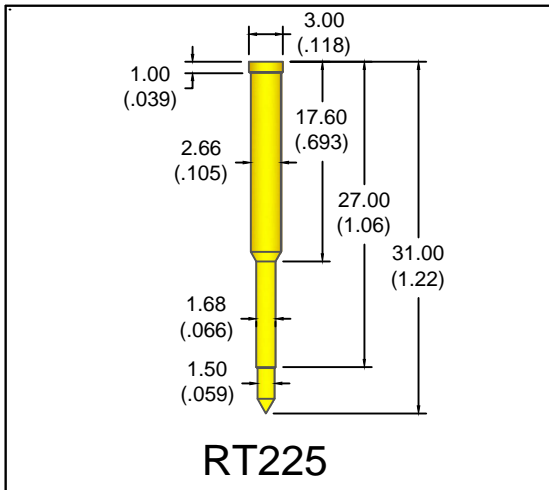



### MOUNTING HOLE SIZE

2.58/2.62 (.101/.103)

### MATERIALS AND FINISHES

BARREL	Copper alloy gold plated
--------	--------------------------

## AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	C060T20C16 C060T23C16 C060T26C16 C060T35C16 C060T43C16				
	C120T20C20				
				NOTES <b>MATERIALS</b> <b>S</b> - STEEL <b>L</b> - COPPER ALLOY	

### HOW TO ORDER

MODEL <b>TOP 225</b>	HEAD <b>C</b>	HEAD DIA <b>060T20C16</b>	SPRING FORCE 2/3 TRAVEL <b>100</b>	TREATMENT <b>G</b>
-------------------------	------------------	------------------------------	--	-----------------------