

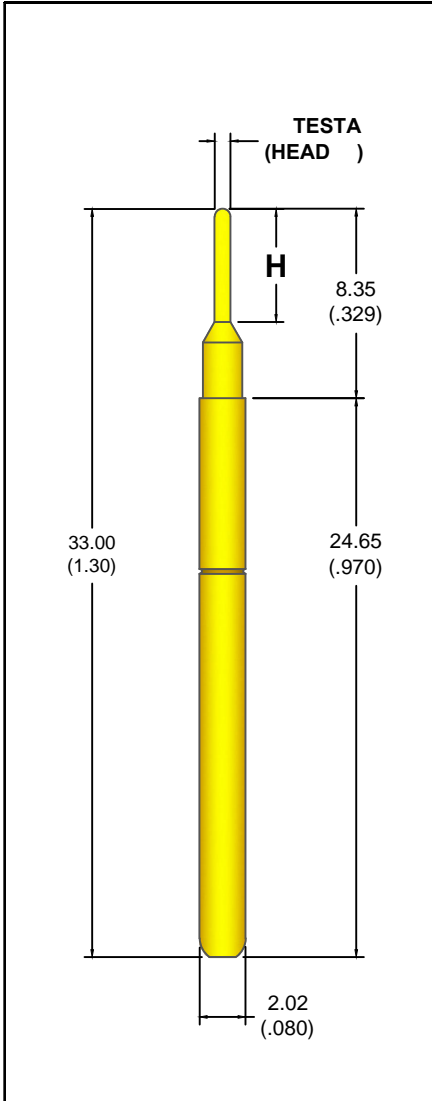
TOP 3 AUTOMOTIVE

3.18(.125) CENTERS

6.35(.250) PLUNGER TRAVEL

Dimensions in mm (inches)

TECHNICAL DATAS



Minimum centers	3.18 mm (.125)
Full travel	6.35 mm (.250)
Rated stroke	4.20 mm (.165)
Probe resistance	< 10 MOhm
Operating temperature	-55°C/ +105°C (-67°F/+221°F)
Current rating	5 AMP

MATERIALS AND FINISHES


Plunger	Copper alloy or steel, gold plated
Barrel	Copper alloy, gold plated
Spring	Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
40 (1.41)	120 (4.23)
60 (2.12)	180 (6.35)
80 (2.82)	250 (8.82)
150 (5.29)	440 (15.5)

Additional spring forces available. Please consult factory

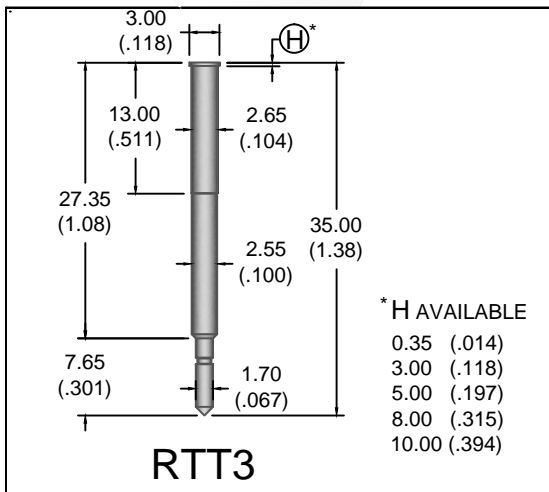RECEPTACLE SPECIFICATIONS









MOUNTING HOLE SIZE
2.58/2.62 (.101/.103)

MATERIALS AND FINISHES

BARREL Copper alloy gold plated

* H AVAILABLE
0.35 (.014)
3.00 (.118)
5.00 (.197)
8.00 (.315)
10.00 (.394)

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	069H15 069H25 069H45 070H40 070H50		070H50 090H40 090H50		
	080H65 090H40 090H50		090H40 090H45		
	098H15				
	120H40 120H50			NOTES MATERIALS: S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL TOP 3	HEAD D	HEAD DIA 070H50	SPRING FORCE 2/3 TRAVEL 120	TREATMENT G
----------------	-----------	--------------------	-----------------------------------	----------------