

TOP44 AUTOMOTIVE WITH COLLAR

DEPENDS TO THE DIAMETER OF COLLAR


DEPENDS TO THE POSITION OF THE RING

CENTERS

PLUNGER TRAVEL

Dimensions in mm (inches)

TECHNICAL DATAS

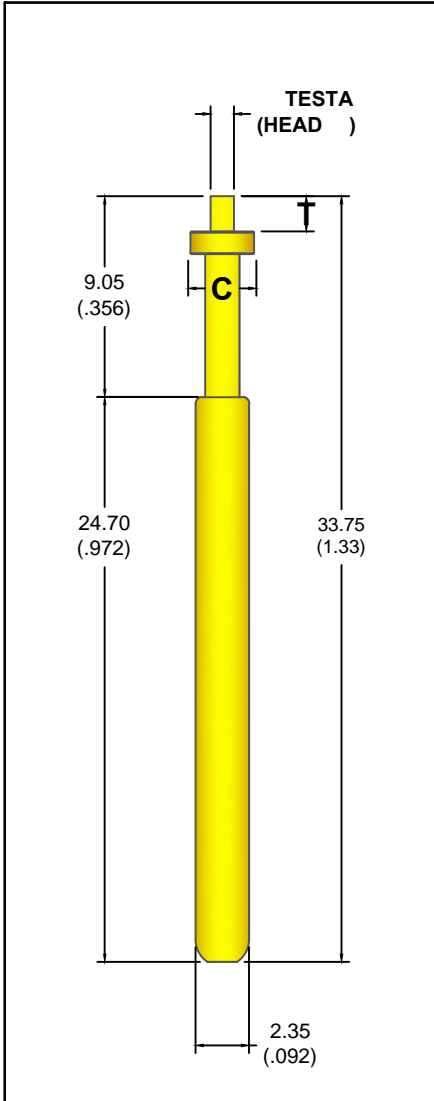

Probe resistance
Operating temperature
Current rating

< 10 MOhm
-55°C/ +105°C (-67°F/+221°F)
5 AMP

MATERIALS AND FINISHES

Plunger
Barrel
Spring


Copper alloy, gold plated
Copper alloy, gold plated
Music wire, gold plated

SPRING FORCE IN GR. (OZ.)

PRELOAD	2/3 TRAVEL
60 (.2.12)	130 (4.59)
80 (2.82)	190 (6.70)
120 (4.23)	300 (10.58)

Additional spring forces available. Please consult factory

RECEPTACLE SPECIFICATIONS

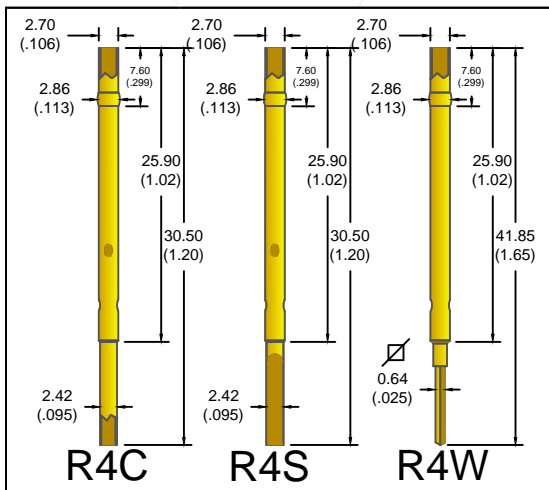

MOUNTING HOLE SIZE

2.72/ 2.77 (.107/.109)

CONNECTIONS


CRIMP - C
SOLDER - S
WIRE WRAP - W

MATERIALS AND FINISHES

BARREL
SQUARED POST.

Copper alloy gold plated
Ph Bronze gold plated

AVAILABLE HEAD STYLES

Head style	Available diametres	Head style	Available diametres	Head style	Available diametres
	100T15C28				
				NOTES MATERIALS S - STEEL L - COPPER ALLOY	

HOW TO ORDER

MODEL TOP 44	HEAD G	HEAD DIA 100T15C28	SPRING FORCE 2/3 TRAVEL 190	TREATMENT G
-----------------	-----------	-----------------------	-----------------------------------	----------------